

# LOW TEMP FREEZER (-15°F)

## Model: 1F-LT-HD

### 1-Section Reach-In Low Temp Freezer with Half Doors

1F-LT-HD - Stainless steel front, aluminum end panels and interior  
 1F-LT-SA-HD - Stainless steel exterior, aluminum interior  
 1F-LT-SS-HD - Stainless steel exterior and interior  
**Designed to maintain NSF-7 temperatures in 100°F ambient.**



#### Options and Accessories

(upcharge and lead times may apply)

|                                       |   |
|---------------------------------------|---|
| Stainless steel case back             | Pass-Thru (consult factory)               |
| Additional epoxy-coated steel shelves | Shallow depth (consult factory)           |
| Chrome or stainless steel shelves     | Hinged glass doors                        |
| Heavy-duty pilaster strips            | Increased refrigeration systems           |
| Rehinging of doors (consult factory)  | Special electrical req. (consult factory) |
| Pan slide assemblies                  | <b>Correctional Facility Options</b>      |
| Adjustable legs                       | • One way security screws                 |
| Digital thermometer                   | • Locking hasp (lock not included)        |
| Custom laminates                      | • Stainless steel mesh cover              |
| Full door                             | • Coverless hinges                        |

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

#### Standard Model Features

##### REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant  
 Self contained, performance-rated refrigeration system  
 Automatic, electric condensate evaporator

##### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation  
 Smooth, polished chrome workflow door handles  
 Cam action, lift off hinges  
 Self-closing doors  
 Magnetic snap-in door gaskets  
 Cylinder lock in door  
 Heavy-duty, epoxy-coated steel shelves  
 5" casters

##### MODEL FEATURES

Thermal expansion valve  
 LED interior lighting  
 External dial thermometer  
 Energy saving switch for door heaters  
 Automatic electric defrost

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|  |                  |
|--|------------------|
| Net Capacity (cu. ft.)                   | 20 (566 cu l)    |
| Width, Overall (in.)                     | 26 (660 mm)      |
| Depth, Overall (in.) (incl. handles)     | 35 3/8 (899 mm)  |
| Depth [less doors] (in.)                 | 32 (813 mm)      |
| Depth [doors open 90°] (in.)             | 55 1/2 (1410 mm) |
| Clear Door Width (in.)                   | 19 3/8 (492 mm)  |
| Clear Half Door Height (in.)             | 27 1/2 (699 mm)  |
| Height, Overall (in.) (incl. 5" casters) | 82 1/4 (2096 mm) |
| No. of Doors                             | 2                |
| No. of Shelves                           | 3                |
| Shelf Area (sq. ft.)                     | 20.4 (1.9 sq m)  |
| Tray Slide Capacity (per half section)   | 11               |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 3/4  |
| Capacity (BTU/Hr)*          | 2050 |

### ELECTRICAL DATA

|                           |                                |
|---------------------------|--------------------------------|
| Voltage (int'l)           | 115/208-230/60/1<br>(220/50/1) |
| Feed Wires (incl. ground) | 4                              |
| Total Amps (int'l)        | 10.6 (4.4)                     |
| Defrost Amps (int'l)      | 5.2 (2.6)                      |
| 10 ft. Cord/Plug (int'l)  | No (No)                        |



### SHIPPING DATA

|                              |                  |
|------------------------------|------------------|
| Height - Crated (in.)        | 85 1/2 (2172 mm) |
| Width - Crated (in.)         | 31 5/8 (803 mm)  |
| Depth - Crated (in.)         | 42 (1067 mm)     |
| Volume - Crated (cu. ft.)    | 65 (1841 cu l)   |
| Weight Std - Crated (lbs.)   | 450 (204 kg)     |
| Weight SS - Crated (lbs.)    | 510 (231 kg)     |
| Weight Std - Uncrated (lbs.) | 350 (159 kg)     |
| Weight SS - Uncrated (lbs.)  | 410 (186 kg)     |

\* Rating @ -30°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

## Model Plan Views

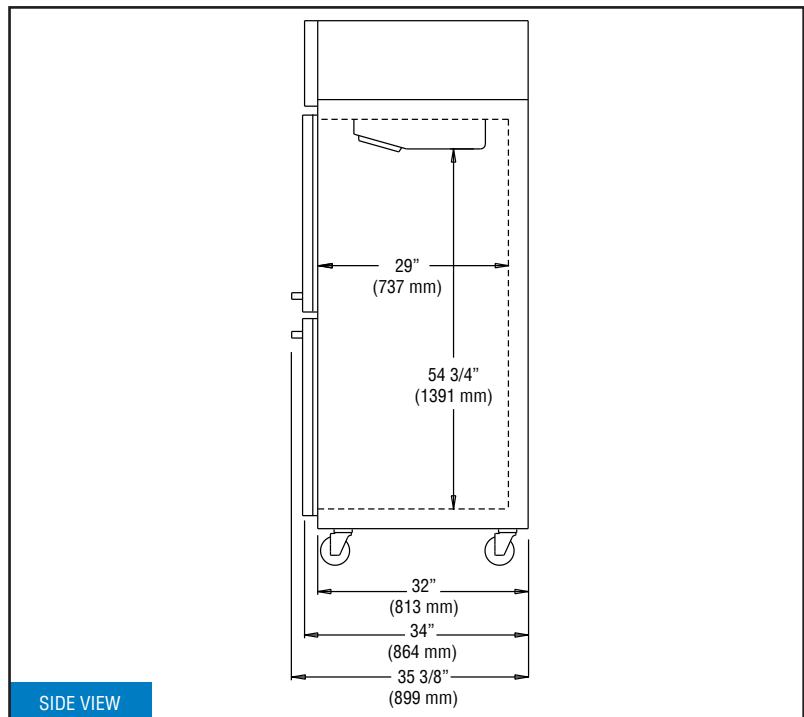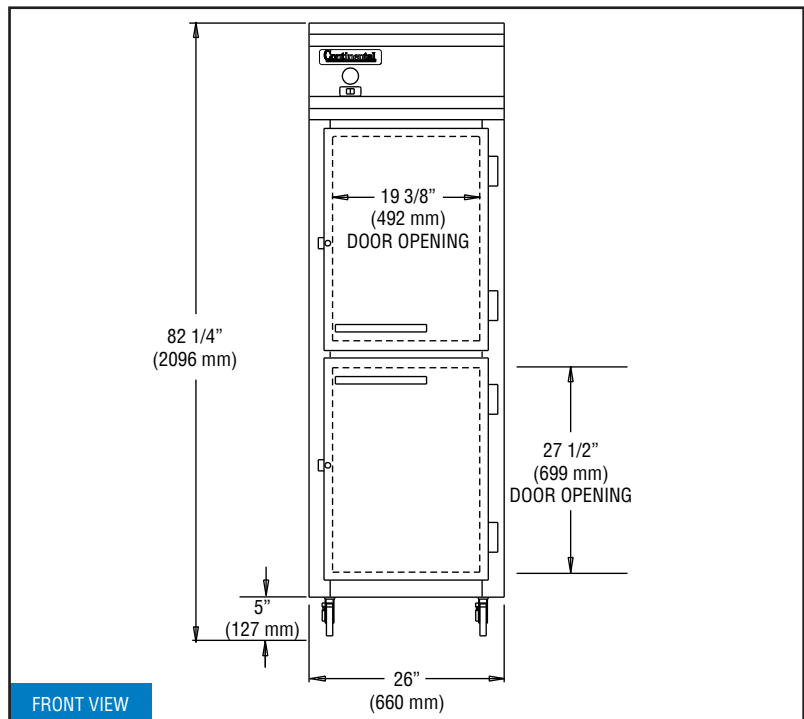

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2016. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.