

# DISPLAY FREEZER (0°F)

## Model: 1FS-GD

### 1-Section Display Freezer with Hinged Glass Door - Shallow Depth

**1FS-GD** - Stainless steel front, aluminum end panels and interior  
**1FS-SA-GD** - Stainless steel exterior, aluminum interior  
**1FS-SS-GD** - Stainless steel exterior and interior  
**Designed to maintain NSF-7 temperatures in 100°F ambient.**



#### Options and Accessories

(upcharge and lead times may apply)

|                                       |   |
|---------------------------------------|---|
| Stainless steel case back             | Remote models                                     |
| Additional epoxy-coated steel shelves | Half glass doors                                  |
| Chrome or stainless steel shelves     | Standard depth                                    |
| Heavy-duty pilaster strips            | Solid door (full or half doors)                   |
| Rehinging of door (consult factory)   | Special electrical requirements (consult factory) |
| Adjustable legs                       | Increased refrigeration system                    |
| Digital thermometer                   |   |

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138**  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

#### Standard Model Features

##### REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant  
 Self contained, performance-rated refrigeration system  
 Automatic, electric condensate evaporator  
 Thermal expansion valve

##### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation  
 Chrome-plated handle  
 Cam action, lift off hinges  
 Self-closing door  
 Magnetic snap-in door gasket  
 Cylinder lock in door  
 Heavy-duty, epoxy-coated steel shelves  
 Triple-pane, tempered hinged glass door  
 5" casters

##### MODEL FEATURES

LED interior lighting  
 External dial thermometer  
 Energy saving switch for door heater  
 Automatic electric defrost

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|  |                  |
|--|------------------|
| Net Capacity (cu. ft.)                   | 16 (453 cu l)    |
| Width, Overall (in.)                     | 26 (660 mm)      |
| Depth, Overall (in.) (incl. handle)      | 29 1/4 (743 mm)  |
| Depth (in.) (less door)                  | 25 7/8 (657 mm)  |
| Depth (in.) (door open 90°)              | 49 3/8 (1254 mm) |
| Clear Door Width (in.)                   | 19 3/8 (492 mm)  |
| Clear Door Height (in.)                  | 58 5/8 (1489 mm) |
| Height, Overall (in.) (incl. 5" casters) | 82 1/4 (2089 mm) |
| No. of Doors                             | 1                |
| No. of Shelves                           | 4                |
| Shelf Area (sq. ft.)                     | 20.4 (1.9 sq m)  |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/2  |
| Capacity (BTU/Hr)*          | 2470 |

### ELECTRICAL DATA

|                                     |                     |
|-------------------------------------|---------------------|
| Voltage (int'l)                     | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground)           | 3                   |
| Total Amps (int'l)                  | 11.4 (5.3)          |
| Defrost Amps (int'l)                | 5.2 (2.6)           |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No)            |

### SHIPPING DATA

|                              |                  |
|------------------------------|------------------|
| Height - Crated (in.)        | 85 1/2 (2172 mm) |
| Width - Crated (in.)         | 31 5/8 (803 mm)  |
| Depth - Crated (in.)         | 42 (1067 mm)     |
| Volume - Crated (cu. ft.)    | 65 (1841 cu l)   |
| Weight Std - Crated (lbs.)   | 330 (150 kg)     |
| Weight SS - Crated (lbs.)    | 390 (177 kg)     |
| Weight Std - Uncrated (lbs.) | 230 (104 kg)     |
| Weight SS - Uncrated (lbs.)  | 290 (132 kg)     |

\* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

# Continental

Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)



Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2014. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

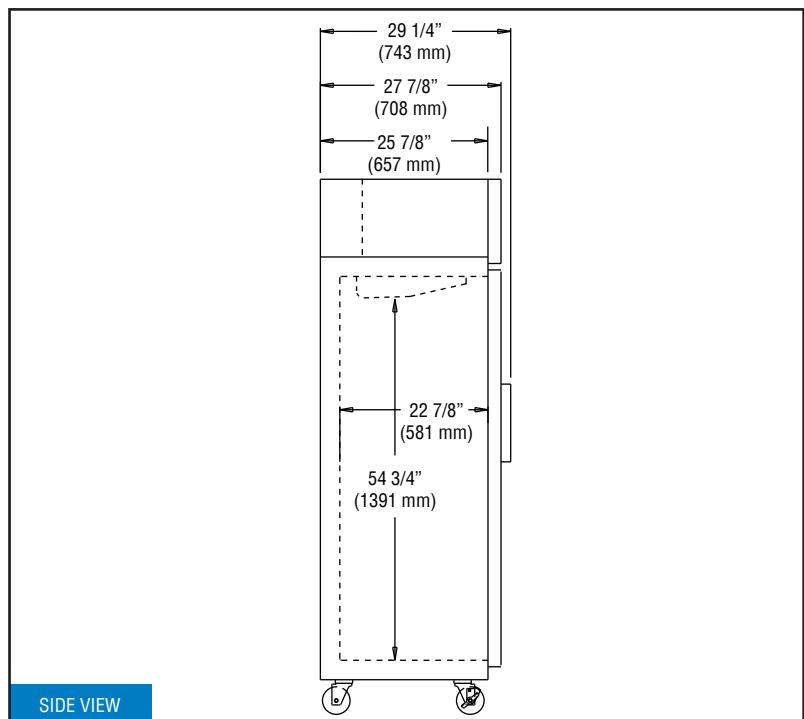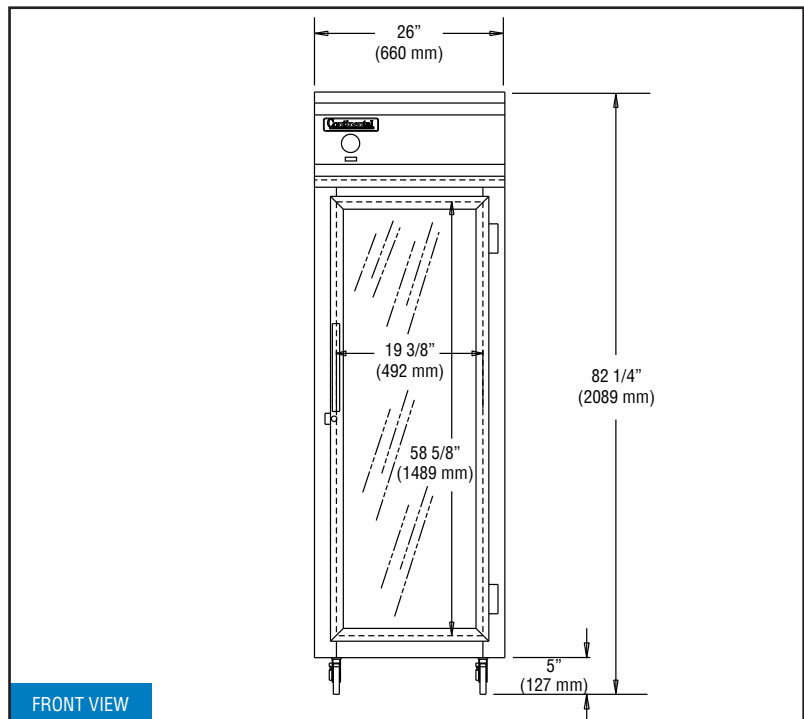

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.