

PASS-THRU REFRIGERATOR

Model: 1RE-PT

1-Section Extra-Wide Pass-Thru Refrigerator

1RE-PT - Stainless steel front, aluminum end panels and interior
1RE-SA-PT - Stainless steel exterior, aluminum interior
1RE-SS-PT - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|---|
| Stainless steel case back | Custom laminates |
| Additional epoxy-coated steel shelves | Half doors |
| Chrome or stainless steel shelves | Shallow depth |
| Pan slide assemblies | Hinged glass doors |
| Heavy-duty pilaster strips | Increased refrigeration systems |
| Rehinging of doors (consult factory) | Special electrical req. (consult factory) |
| Expansion valve system | Correctional Facility Options |
| Wine display | • One way security screws |
| Adjustable legs | • Locking hasp (lock not included) |
| Digital thermometer | • Stainless steel mesh cover |
| Remote models | • Coverless hinges |

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Self contained, performance-rated refrigeration system

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

External dial thermometer

Energy saving switch for door heaters

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|------------------|
| Net Capacity (cu. ft.) | 21 (595 cu l) |
| Width, Overall (in.) | 28 1/2 (724 mm) |
| Depth, Overall (in.) (incl. handles) | 38 3/4 (984 mm) |
| Depth [less doors] (in.) | 32 (813 mm) |
| Depth [door open 90°] (in.) | 84 (2134 mm) |
| Clear Door Width (in.) | 21 7/8 (556 mm) |
| Clear Door Height (in.) | 58 5/8 (1489 mm) |
| Height, Overall (in.) (incl. 5" casters) | 82 1/4 (2096 mm) |
| No. of Doors | 2 |
| No. of Shelves | 3 |
| Shelf Area (sq. ft.) | 20.4 (1.9 sq m) |
| Tray Slide Capacity | 24 |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4 |
| Capacity (BTU/Hr)* | 1940 |

ELECTRICAL DATA

| | |
|-------------------------------------|---------------------|
| Voltage (int'l) | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground) | 3 |
| Total Amps (int'l) | 5.8 (3.8) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA

| | |
|------------------------------|------------------|
| Height - Crated (in.) | 85 1/2 (2172 mm) |
| Width - Crated (in.) | 31 5/8 (803 mm) |
| Depth - Crated (in.) | 42 (1067 mm) |
| Volume - Crated (cu. ft.) | 65 (1841 cu l) |
| Weight Std - Crated (lbs.) | 360 (163 kg) |
| Weight SS - Crated (lbs.) | 420 (191 kg) |
| Weight Std - Uncrated (lbs.) | 260 (118 kg) |
| Weight SS - Uncrated (lbs.) | 320 (145 kg) |



* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

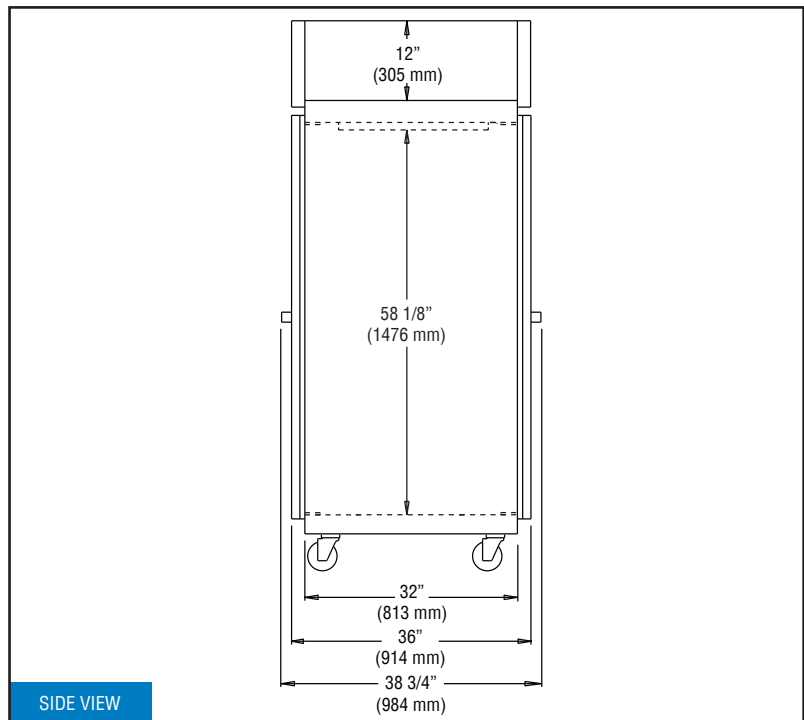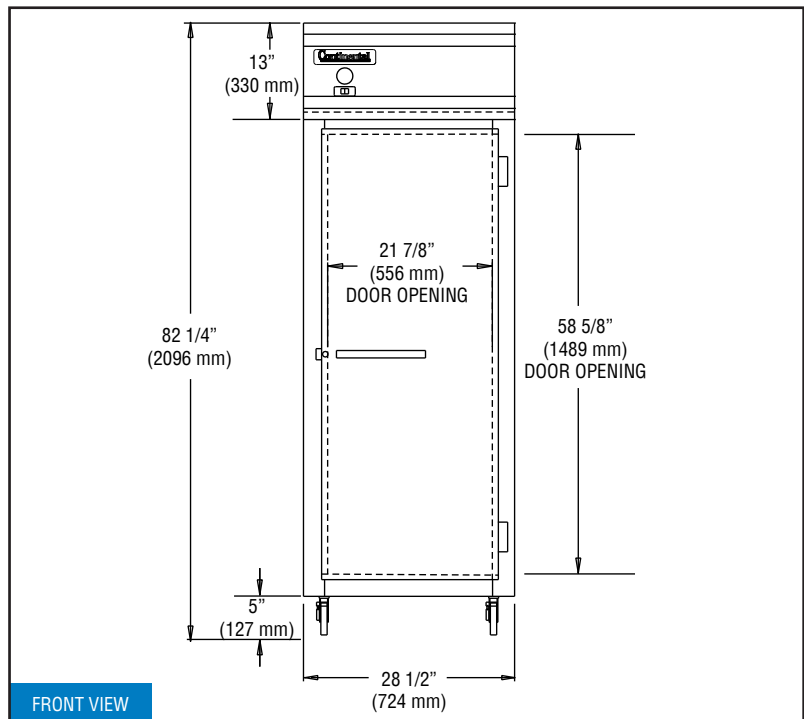

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2015, Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.