

DISPLAY REFRIGERATOR

Model: 2RES-SGD

2-Section Extra-Wide Display Refrigerator with Sliding Glass Doors Shallow Depth

2RES-SGD - Stainless steel front, aluminum end panels and interior
 2RES-SA-SGD - Stainless steel exterior, aluminum interior
 2RES-SS-SGD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Hinged glass doors
Heavy-duty pilaster strips	Half doors
Additional epoxy-coated steel shelves	Adjustable legs
Chrome or stainless steel shelves	Wine display
Digital thermometer	Remote models
Expansion valve system	Special electrical requirements (consult factory)
Standard depth	Increased refrigeration system
Pass-thru (glass one side only)	

Consult factory for other model configurations, options and accessories.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Self contained, performance-rated refrigeration system

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Self-closing doors

Magnetic snap-in door gaskets

Door lock

Heavy-duty, epoxy-coated steel shelves

Double-pane, tempered sliding glass doors

5" casters

MODEL FEATURES

LED interior lighting

External dial thermometer

Energy saving switch for door heaters

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	52 (1472 cu l)
Width, Overall (in.)	57 (1448 mm)
Depth, Overall [incl. grill] (in.)	27 7/8 (708 mm)
Depth [less grill] (in.)	25 7/8 (657 mm)
Clear Door Width (in.)	21 7/8 (556 mm)
Clear Door Height (in.)	58 1/4 (1480 mm)
Height, Overall (incl. 5" casters) (in.)	82 1/4 (2089 mm)
No. of Shelves	8
Shelf Area (sq. ft.)	40.8 (3.8 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	4010

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	14.3 (6.9)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA



Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	55 (1397 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu l)
Weight Std - Crated (lbs.)	575 (261 kg)
Weight SS - Crated (lbs.)	610 (277 kg)
Weight Std - Uncrated (lbs.)	360 (163 kg)
Weight SS - Uncrated (lbs.)	440 (200 kg)

* Rating @ +25°F evaporator, 90°F ambient
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
 (varies by country)

Model Plan Views

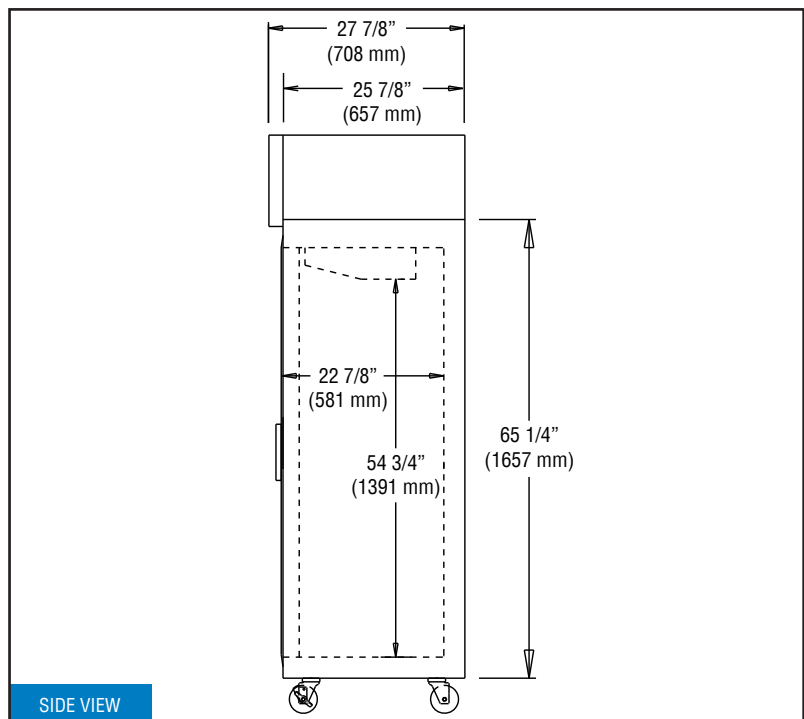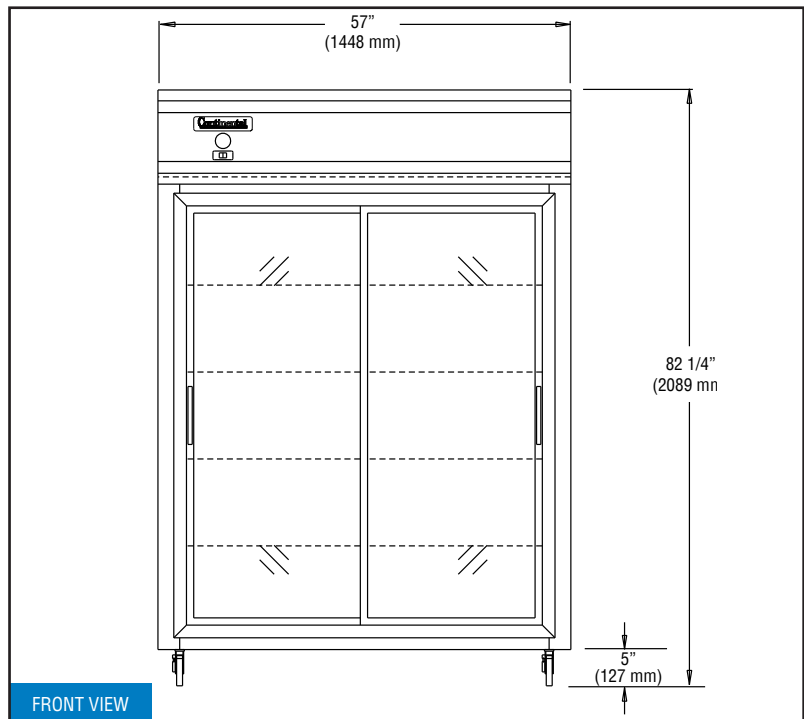

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunkserry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2014. Continental Refrigerator.
 A Division of National Refrigeration & Air Conditioning Products, Inc.