

DUAL TEMP REFRIGERATOR/FREEZER

Model: 2RFE-HD

2-Section Dual Temp Extra-Wide Reach-In Refrigerator/Freezer (0°F)

2RFE-HD - Stainless steel front, aluminum end panels and interior
 2RFE-SA-HD - Stainless steel exterior, aluminum interior
 2RFE-SS-HD - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Shallow depth (consult factory)
Add'l epoxy-coated steel shelves	Hinged glass doors (consult factory)
Chrome or stainless steel shelves	Full doors
Rehinging of doors (consult factory)	Increased refrigeration systems
Expansion valve system	Special electrical req. (consult factory)
Wine Display (refrigerators only)	Correctional Facility Options
Adjustable legs	<ul style="list-style-type: none"> One way security screws
Custom laminates	<ul style="list-style-type: none"> Locking hasp (lock not included)
Pan slide assemblies	<ul style="list-style-type: none"> Stainless steel mesh cover
Pass-Thru (consult factory)	<ul style="list-style-type: none"> Coverless hinges

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant (refrigerator)
 Environmentally-safe R-404A refrigerant (freezer)
 Separate, self contained, performance-rated refrigeration systems
 Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
 Smooth, polished chrome workflow door handles
 Cam action, lift off hinges
 Self-closing doors
 Magnetic snap-in door gaskets
 Cylinder lock in door
 Heavy-duty, epoxy-coated steel shelves
 5" casters

MODEL FEATURES

LED interior lighting
 Electronic controllers w/digital display & hi-low alarm
 Automatic electric defrost (freezer section)

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	21/21 (595/595 cu l)
Width, Overall (in.)	57 (1448 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	58 (1473 mm)
Clear Door Width (in.)	21 7/8 (556 mm)
Clear Half Door Height (in.)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 5" casters)	82 1/4 (2089 mm)
No. of Half Doors	4
No. of Shelves	6
Shelf Area (sq. ft.) (per section)	20.4 (1.9 sq m)
Tray Slide Capacity (per half section)	11

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4, 1/3
Capacity (BTU/Hr)*	1940 / 1590

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3 / 3
Total Amps (int'l)	5.5 (3.5) / 7.2 ()
Defrost Amps (int'l)	5.2 (2.6)
(2) 10 ft. Cord/Plug [attach.] (int'l)	Yes (Yes)

SHIPPING DATA



Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu l)
Weight Std - Crated (lbs.)	620 (281 kg)
Weight SS - Crated (lbs.)	700 (318 kg)
Weight Std - Uncrated (lbs.)	450 (204 kg)
Weight SS - Uncrated (lbs.)	370 (168 kg)

* Rating @ +25°F evaporator, 90°F ambient (refrigerator)

* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

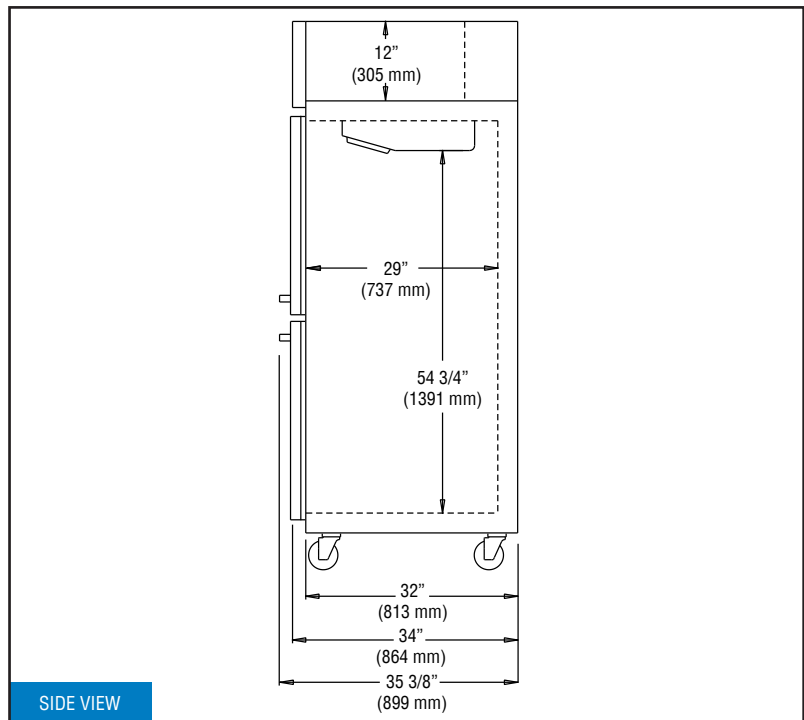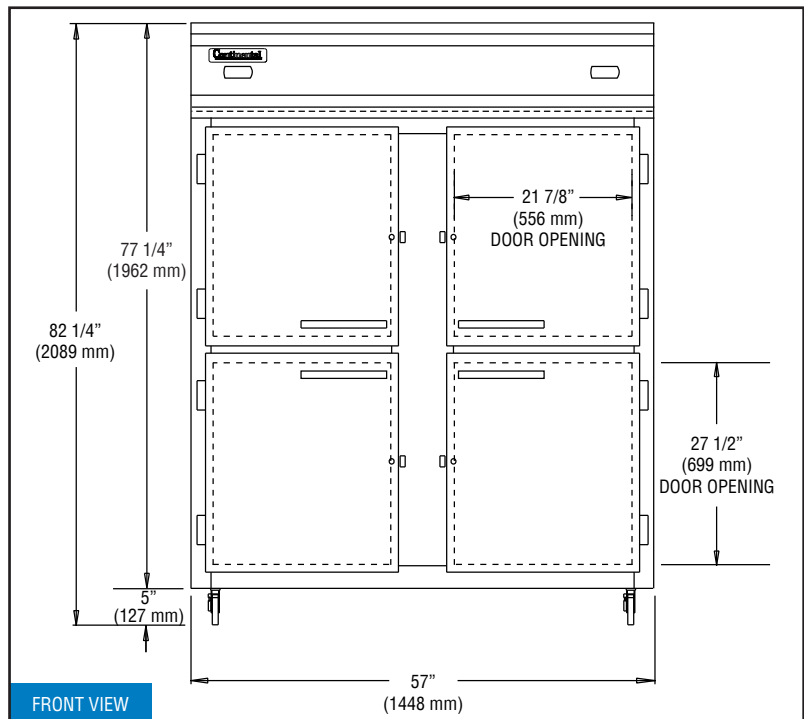

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.



Equipped with two NEMA-5-15P Plugs
(varies by country)

© Copyright 2018. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

2RFE-HD (3/9/18)