

DISPLAY REFRIGERATOR

Model: 2RS-GD

2-Section Display Reach-In Refrigerator with Hinged Glass Doors Shallow Depth

2RS-GD - Stainless steel front, aluminum end panels and interior
 2RS-SA-GD - Stainless steel exterior, aluminum interior
 2RS-SS-GD - Stainless steel exterior and interior
 Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|---|
| Stainless steel case back | Digital thermometer |
| Additional epoxy-coated steel shelves | Remote models |
| Chrome or stainless steel shelves | Half glass doors |
| Heavy-duty pilaster strips | Pass-thru (consult factory) |
| Rehinging of doors (consult factory) | Standard depth |
| Expansion valve system | Solid doors (full or half doors) |
| Wine display | Special electrical requirements (consult factory) |
| Adjustable legs | Increased refrigeration system |

Consult factory for other model configurations, options and accessories.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Self contained, performance-rated refrigeration system

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Chrome-plated handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

Double-pane, tempered hinged glass doors

5" casters

MODEL FEATURES

LED interior lighting

External dial thermometer

Energy saving switch for door heaters

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|------------------|
| Net Capacity (cu. ft.) | 32 (906 cu l) |
| Width, Overall (in.) | 52 (1321 mm) |
| Depth, Overall (in.) (incl. handles) | 29 1/4 (743 mm) |
| Depth [less doors] (in.) | 25 7/8 (657 mm) |
| Depth [doors open 90°] (in.) | 49 3/8 (1254 mm) |
| Clear Door Width (in.) | 19 3/8 (492 mm) |
| Clear Door Height (in.) | 58 5/8 (1489 mm) |
| Height, Overall (in.) (incl. 5" casters) | 82 1/4 (2089 mm) |
| No. of Doors | 2 |
| No. of Shelves | 8 |
| Shelf Area (sq. ft.) | 40.8 (3.8 sq m) |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/2 |
| Capacity (BTU/Hr)* | 4010 |

ELECTRICAL DATA

| | |
|-------------------------------------|---------------------|
| Voltage (int'l) | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground) | 3 |
| Total Amps (int'l) | 14.3 (6.9) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA


| | |
|------------------------------|------------------|
| Height - Crated (in.) | 85 1/2 (2172 mm) |
| Width - Crated (in.) | 64 (1626 mm) |
| Depth - Crated (in.) | 42 (1067 mm) |
| Volume - Crated (cu. ft.) | 133 (3766 cu l) |
| Weight Std - Crated (lbs.) | 530 (240 kg) |
| Weight SS - Crated (lbs.) | 610 (277 kg) |
| Weight Std - Uncrated (lbs.) | 360 (163 kg) |
| Weight SS - Uncrated (lbs.) | 440 (200 kg) |

* Rating @ +25°F evaporator, 90°F ambient
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Equipped with one NEMA-5-15P Plug
 (varies by country)

Model Plan Views

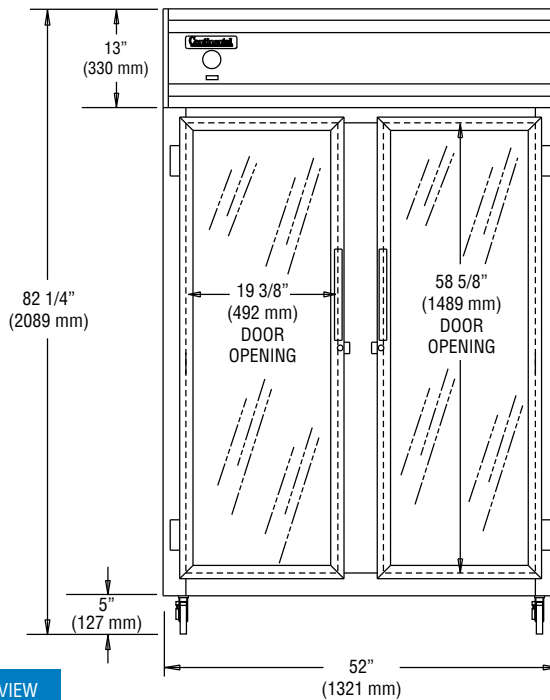

FRONT VIEW

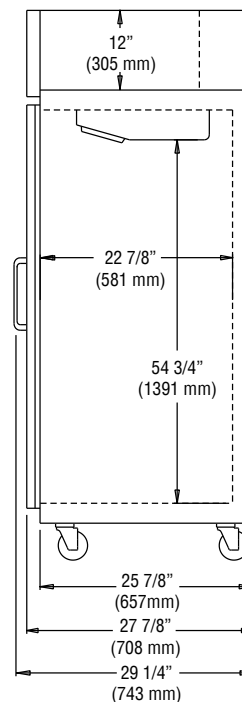

SIDE VIEW

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunkserry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2015, Continental Refrigerator.
 A Division of National Refrigeration & Air Conditioning Products, Inc.