

DISPLAY REFRIGERATOR

Model: 3R-GD

3-Section Display Reach-In Refrigerator with Hinged Glass Doors

3R-GD - Stainless steel front, aluminum end panels and interior
3R-SA-GD - Stainless steel exterior, aluminum interior
3R-SS-GD - Stainless steel exterior and interior
 Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Wine display
Add'l epoxy-coated steel shelves	Adjustable legs
Chrome or stainless steel shelves	Half glass doors
Heavy-duty pilaster strips	Pass-thru (consult factory)
Pan slide assemblies	Solid doors (full or half doors)
Rehinging of doors (consult factory)	Increased refrigeration system
Expansion valve system	Special electrical req. (consult factory)

Consult factory for other model configurations, options and accessories.

Continental[®]
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Self contained, performance-rated refrigeration system

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Chrome-plated handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

Triple-pane, tempered hinged glass doors

5" casters

MODEL FEATURES

LED interior lighting

Electronic controller w/digital display & hi-low alarm

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	70 (1982 cu l)
Width, Overall (in.)	78 (1981 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	55 1/2 (1410 mm)
Clear Door Width (in.)	19 3/8 (492 mm)
Clear Door Height (in.)	58 5/8 (1489 mm)
Height, Overall (in.) (incl. 5" casters)	85 3/4 (2178 mm)
No. of Doors	3
No. of Shelves	12
Shelf Area (sq. ft.)	61.2 (5.7 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	3/4
Capacity (BTU/Hr)*	5930

ELECTRICAL DATA

Voltage (int'l)	115/208-230/60/1 (220/50/1)
Feed Wires (incl. ground)	4
Total Amps (int'l)	12.4 (9.7)
10 ft. Cord/Plug (int'l)	No (No)



SHIPPING DATA

Height - Crated (in.)	89 (2261 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	187 (5295 cu l)
Weight Std - Crated (lbs.)	740 (336 kg)
Weight SS - Crated (lbs.)	855 (388 kg)
Weight Std - Uncrated (lbs.)	530 (240 kg)
Weight SS - Uncrated (lbs.)	645 (293 kg)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

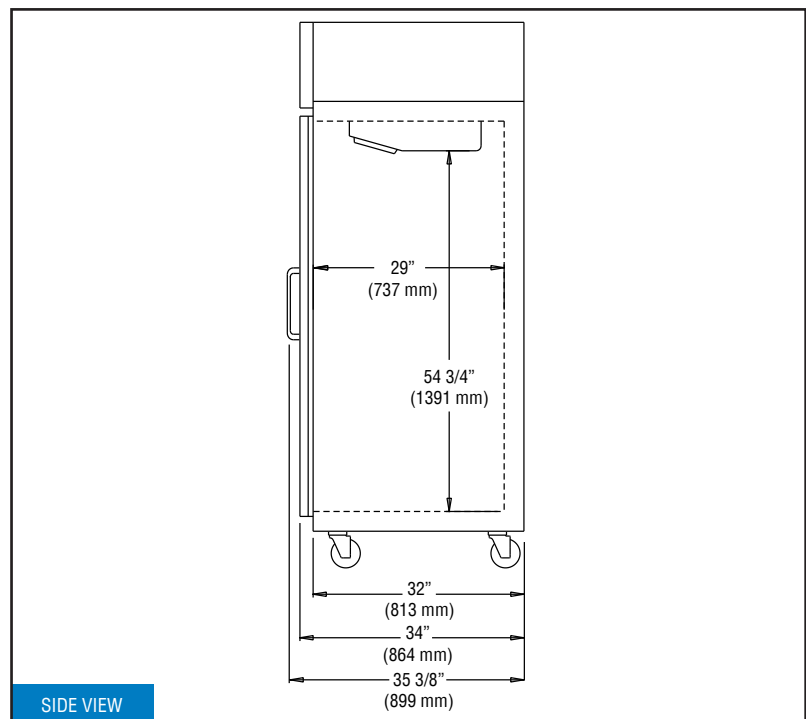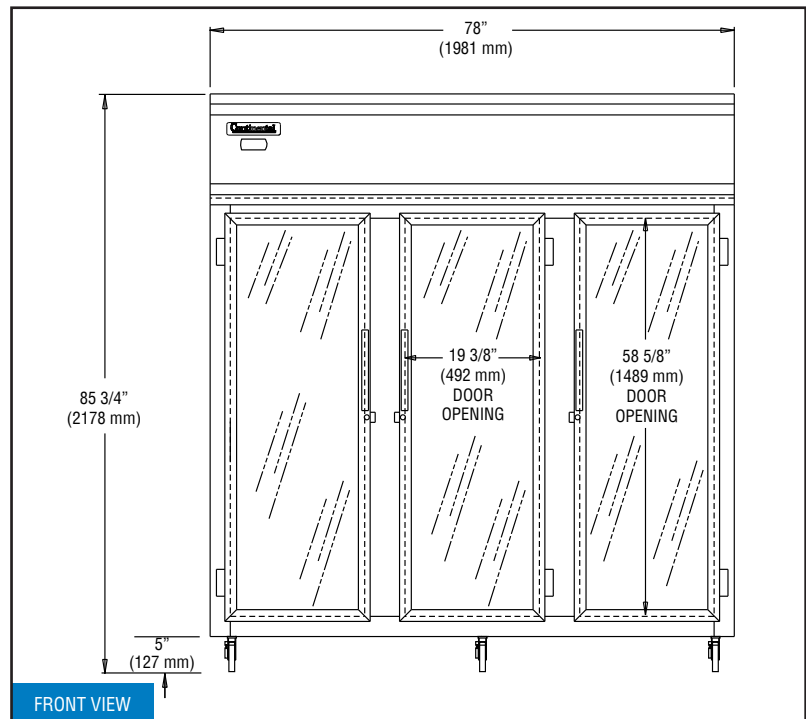

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Intertek



MADE IN THE U.S.A.

© Copyright 2018. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.