

# DESIGNER LINE ROLL-THRU WARMER

**Model: DL1WI-RT**

## 1-Section Roll-Thru Warmer with 66¼" Cart Capacity

Standard - Stainless steel front, aluminum end panels and interior  
 Suffix SA- Stainless steel exterior, aluminum interior  
 Suffix SS - Stainless steel exterior and interior



### Options and Accessories

(upcharge and lead times may apply)

|                                      |  |
|--------------------------------------|--|
| Stainless steel case back            | Special electrical req. (consult factory)  |
| Chrome or stainless steel shelves    | <b>Correctional Facility Options</b>   |
| Rehinging of doors (consult factory) | <ul style="list-style-type: none"> <li>One way security screws</li> </ul>          |
| Custom laminates                     | <ul style="list-style-type: none"> <li>Locking hasp (lock not included)</li> </ul> |
| Half doors                           | <ul style="list-style-type: none"> <li>Stainless steel mesh cover</li> </ul>       |
| Roll-In                              | <ul style="list-style-type: none"> <li>Coverless hinges</li> </ul>                 |
| Hinged glass doors                   |  |

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### HEATING SYSTEM

Self-contained, performance-rated "plug" warming system  
 90°F - 180°F temperature range  
 Humidity relief vent with master on/off control switch  
 Unique air flow distribution ducts  
 Heating system is accessible on top of cabinet, separate from the food zone

#### CABINET ARCHITECTURE

Removable stainless steel rack guides  
 Removable stainless steel ramps  
 Reinforced stainless steel floor  
 3" non-CFC polyurethane foam insulation  
 Chrome-plated flow line handles  
 Cam action, lift off hinges  
 Magnetic snap-in door gaskets  
 Cylinder lock in door  
 Self-closing doors  
 66 1/2" high door openings (66 1/4"H rack capacity\*)

#### Standard Finish

Stainless steel front, aluminum end panels and interior

#### -SA Finish

Stainless steel exterior, aluminum interior

#### -SS Finish

Stainless steel exterior and interior

#### MODEL FEATURES

External thermostat control  
 External digital thermometer

\* Racks not supplied

**IMPORTANT NOTE:** Cabinet upper side panels and heating "plug" system can be easily removed and reinstalled at installation site where space limitations are confining.

**Continental**  
 Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                      |                  |
|--------------------------------------|------------------|
| Net Capacity (cu. ft.)               | 32 (906 cu l)    |
| Width, Overall (in.)                 | 35 1/4 (895 mm)  |
| Depth, Overall (incl. handles) (in.) | 38 3/4 (984 mm)  |
| Depth [less doors] (in.)             | 32 (813 mm)      |
| Depth [doors open 90°] (in.)         | 98 (2489 mm)     |
| Clear Door Width (in.)               | 27 3/8 (695 mm)  |
| Clear Full Door Height (in.)         | 66 1/2 (1676 mm) |
| Height, Overall (in.)                | 86 (2184 mm)     |
| No. of Door(s)                       | 2                |
| Rack Capacity**                      | 1 ea.            |

### ELECTRICAL DATA


|                                     |                                |
|-------------------------------------|--------------------------------|
| Voltage (int'l)                     | 115/208-230/60/1<br>(220/50/1) |
| Total Wattage @ 208-230 Volts       | 1500                           |
| Feed Wires (incl. ground)           | 4                              |
| Total Amps (int'l)                  | 7.9 (7.2)                      |
| 10 ft. Cord/Plug [attached] (int'l) | No (No)                        |

### SHIPPING DATA


|                              |                |
|------------------------------|----------------|
| Height - Crated (in.)        | 90 (2286 mm)   |
| Width - Crated (in.)         | 43 (1092 mm)   |
| Depth - Crated (in.)         | 42 (1067 mm)   |
| Volume - Crated (cu. ft.)    | 94 (2661 cu l) |
| Weight Std - Crated (lbs.)   | 475 (215 kg)   |
| Weight SS - Crated (lbs.)    | 580 (263 kg)   |
| Weight Std - Uncrated (lbs.) | 380 (172 kg)   |
| Weight SS - Uncrated (lbs.)  | 460 (209 kg)   |

\*\* Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H  
Figures in parentheses reflect metric equivalents rounded to the nearest whole millimeter.

## Model Plan Views

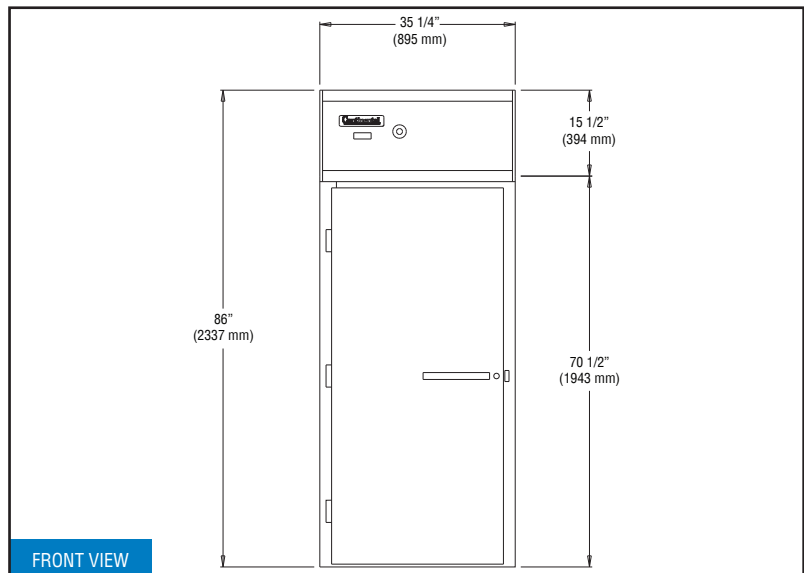

FRONT VIEW

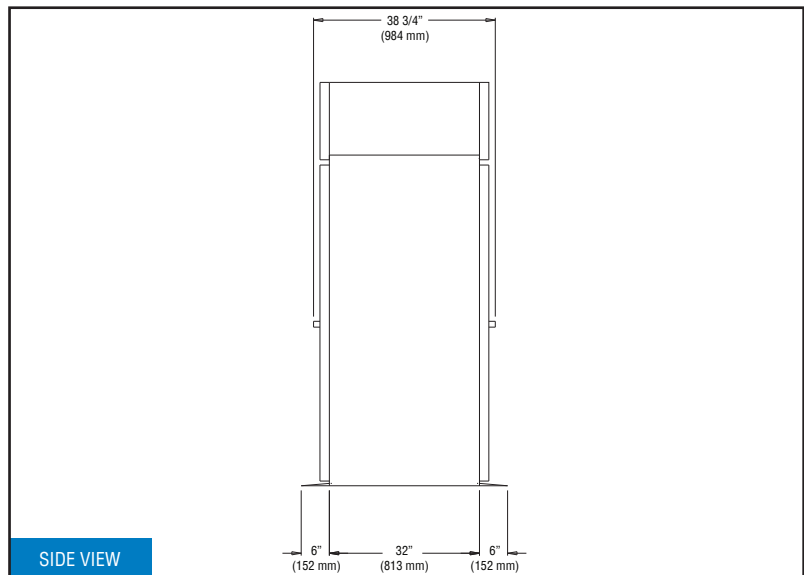

SIDE VIEW

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required.

### HEATING SYSTEM (Range 90°F - 180°F)

Electrically operated heating system is controlled by means of a highly sensitive calibrated thermostat mounted on the cabinet front. Fin strip heating elements are located at the base of the interior. Air circulating blower located in a top mounted, concealed "plug" housing distributes heat throughout product zone, assuring uniform cabinet temperatures. Cabinet top has a built-in humidity relief vent. The entire "plug" system is mounted on a sturdy steel, rail-type base which can be easily removed if refrigerator or freezer conversion is desired. A strict quality assurance team inspects all material and components to certify that each model conforms to the most exacting standards. All models are factory performance tested for a minimum of 16 hours prior to crating.

### INSULATION

All cabinet walls, top and bottom have high density, foamed-in-place, non-CFC polyurethane insulation.

### CABINET CONSTRUCTION

All materials are of top quality, assembled to conform with strict quality-assurance requirements.

The cabinet front is constructed of heavy-gauge polished stainless steel for durability. All cabinet joints and seams are sealed vapor-tight. Case is of all metal, welded construction and internally supported and braced for a rigid unit construction. Cabinet design eliminated overlapping panels with raw edges. Cabinet body is insulated with non-CFC, foamed-in-place polyurethane foam with an average thickness of 3 inches to ensure increased energy efficiency. Automatic interior lighting is controlled by door openings. Cabinets are equipped with an easily removable, stainless steel ramp and interior rack guides.

### DOOR CONSTRUCTION

Solid hinged door shells are constructed of heavy-gauge stainless steel and are internally braced and urethane-foam-insulated for rigidity. Door corners are welded construction and polished. Replaceable snap-in door gaskets are self-adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Doors are provided with built-in cylinder locks which are keyed alike. Hinges are cam action, lift-off type featuring positive safety stop at 120 degrees.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2013. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.