



# Dual-Temp Refrigerator/Warmer



DL2RW-SS

## Options & Accessories

- Half Doors -HD
- Glass Doors -GD
- Remote -R
- Pan Slides
- Additional Shelves
- Stainless Steel Shelves
- Stainless Steel Case Back (including Rear Grill and Concealed Drain Line)
- Hi-Low Alarm with Battery Back-Up

### Correctional Facility Options

- One Way Security Screws
- Locking Hasp (Lock not Included)
- Stainless Steel Mesh Cover
- Coverless Hinges



Approval: \_\_\_\_\_

Project: \_\_\_\_\_ Item# \_\_\_\_\_

Quantity: \_\_\_\_\_ Model Specified: \_\_\_\_\_

AIA# \_\_\_\_\_

SIS# \_\_\_\_\_

## MODELS

- DL2RW**  
S/S Front, Aluminum Ends & Interior
- DL2RW-SA**  
Stainless Exterior/Aluminum Interior
- DL2RW-SS**  
Stainless Steel Exterior & Interior

## Standard Features

- Modern, State-of-the-Art Styling
- Performance Rated "Plug" Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant (Refrigerator Only)
- 3" Non-CFC Polyurethane Foam Insulation
- Chrome-Plated Flow Line Handles
- Cam-Action Lift-Off Hinges
- Self-Closing Doors
- Magnetic Snap-In Door Gasket
- Cylinder Lock in Each Door
- Automatic Hot Gas Condensate Evaporator
- Adjustable 6" Stainless Steel Legs
- Heavy-Duty, Epoxy-Coated Steel Shelves
- External Digital Thermometer

### REFRIGERATION SYSTEM

A "performance rated", air-cooled, hermetically sealed, capillary-type refrigeration system is installed on the top of each refrigerator. Plasticized fin coil and air circulation fans are contained within a concealed "plug"-type insulated housing, readily accessible on top of the cabinet and separate from the food zone to increase food storage capacity. The entire "plug" system is fully charged with environmentally safe R-134a refrigerant and mounted on a sturdy steel, rail-type base which can be easily removed if freezer conversion is desired. Refrigerators are designed to maintain 38-40 degrees Fahrenheit (3 to 5 degrees Centigrade) while operating with an unrestricted air supply in a maximum ambient temperature of 100 degrees Fahrenheit. All condensate water is evaporated by an automatic, non-electric, corrosion-resistant condensate evaporator. A strict quality-assurance team inspects all materials and components to certify that each model conforms to the most exacting standards. All models are factory performance-tested for a minimum of 16 hours prior to crating.

### CABINET CONSTRUCTION

All materials are of top quality, assembled to conform with strict quality-assurance requirements. The cabinet front and doors are constructed of heavy-gauge polished stainless steel for durability. All cabinet joints and seams are sealed vapor-tight. Case is of all metal, welded construction and internally supported and braced for a rigid unit construction. Cabinet design eliminated overlapping panels with raw edges. Cabinet body and doors are insulated with non-CFC, foamed-in-place polyurethane foam with an average thickness of 3 inches to ensure increased energy efficiency. Full-length louvered air grille located above the doors allows equal air circulation to the condensing unit. Easily removable, low-wattage, anti-sweat door heaters concealed by a non-metallic, non-conductive, high-impact thermal breaker strip eliminate condensate build-up on the cabinet front. Automatic interior lighting is controlled by door openings. Cabinets are equipped with 6 inch adjustable stainless steel legs.

### SHELVING

Shelves are designed for heavy-duty use with .306" diameter frame and brace members and .140" diameter fill wires spaced 3/4" apart. Shelves are welded steel and epoxy-coated for a durable, long, rust-free service life. Adjustments are in 1/2 inch increments and a wide door opening allows the use of a variety of optional pan and tray slides types.

### DOOR CONSTRUCTION

Door shells are constructed of heavy-gauge stainless steel and are internally braced and urethane-foam-insulated for rigidity. Door corners are of welded construction and polished. Replaceable snap-in door gaskets are self-adjusting, heavy-duty, magnetic type. Door handles and hinges are chrome-plated and non-corrosive. Doors are provided with built-in cylinder locks which are keyed alike. Hinges are cam-action, lift-off type featuring positive safety stop at 120 degrees.



A Division of National Refrigeration & A/C Products, Inc.  
539 Dunksferry Road Bensalem, PA 19020  
(800) 523-7138 Fax: (215) 244-9579  
www.continentalrefrigerator.com

Printed in the USA  
October, 2002

AIA# \_\_\_\_\_


SIS# \_\_\_\_\_

Project: \_\_\_\_\_ Item# \_\_\_\_\_  
 Quantity: \_\_\_\_\_ Model Specified: \_\_\_\_\_


*Designer-line*

## Dual-Temp Refrigerator/Warmer


Side View

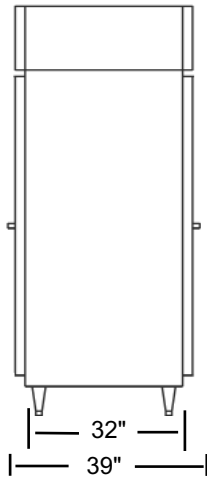

Front View

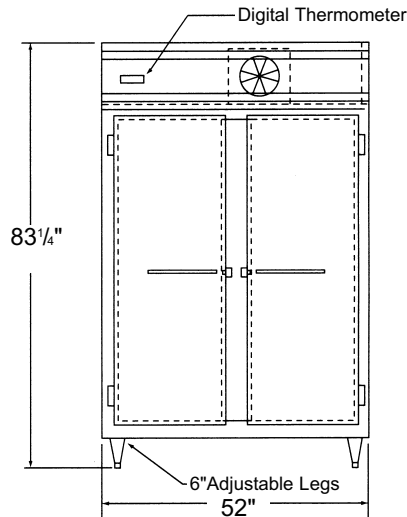

Plan View

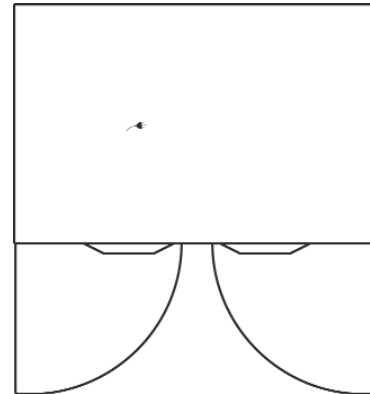

\*Contact Factory for details on CAD Symbols Library Availability on this product.

### Specifications

#### DIMENSIONAL DATA

	English	Metric
Net Capacity	21/21ft <sup>3</sup>	594.65/594.65 l
Width, Overall	52"	132.08 cm
Depth, Overall (Incl. Hdls.)	35 1/2"	99.06 cm
Depth (Less Door(s))	32"	81.28 cm
Depth (Doors(s) Open 90°)	55 1/2"	200.66 cm
Clear Door Width	19 3/8"	49.21 cm
Clear Full-Door Height	58 5/8"	149.91 cm
Clear Half-Door Height	27 1/2"	69.85 cm
Height, Overall (Inc. 6" Legs)	83 1/4"	211.46 cm
No. of Full Door(s)	2	4
No. of Half Door(s)	4	8
No. of Shelves	6	6
Shelf Area (sq. ft.)	20.4/20.4 ft <sup>2</sup>	1.89/1.89 m <sup>2</sup>
Tray Slide Capacity (Half)	12 ea.	12 ea.
Tray Slide Capacity (Full)	25 ea.	25 ea.

#### SHIPPING DATA


Height – crated	82"	202.28 cm
Width – crated	55"	139.7 cm
Depth – crated	37"	93.98 cm
Volume – crated	97 ft <sup>3</sup>	2746.73 l
Weight Std – crated	535 lb	242.67 kg
Weight SS – crated	615 lb	278.96 kg
Weight Std – uncrated	365 lb	165.56 kg
Weight SS – uncrated	445 lb	201.85 kg

#### REFRIGERATION DATA

Condensing Unit Size (H.P.)	1/4
Capacity (BTU/hr)**	1940

#### ELECTRICAL DATA

Cabinet Specifications	115/60/1/115/208-230/60/1
Feed Wires (Incl. Ground) (Refrigerator/Warmer)	3/4
Condensing Unit Specs.	115/60/1
Total Amperes (Refrigerator/Warmer)	6.9/7.8
Total Wattage @ 208-230 Volts	1500
Defrost Amperes	-
Power Supply Cord (Refrigerator/Warmer)	yes/no



Uses One NEMA 5-15 Plug

Note: If the cabinet is located directly against a wall and/or under low ceiling, a minimum clearance of 2" is required.

Cabinet upper side panels and refrigeration plug system can be easily removed and reinstalled at installation site where space limitations are confining.

\*\*Rating @ +25°F Evaporator, 90° Ambient

Note: All Specifications subject to change without notice.

**Continental**  
Refrigerator

A Division of National Refrigeration & A/C Products, Inc.  
 539 Dunksferry Road Bensalem, PA 19020  
 (800) 523-7138 Fax: (215) 244-9579  
 www.continentalrefrigerator.com

Printed in the USA  
 November, 2002