

# DESIGNER LINE WARMER

**Model: DL1W**

*Designer line*

## 1-Section Reach-In Warmer

**DL1W** - Stainless steel front, aluminum end panels and interior  
**DL1W-SA** - Stainless steel exterior, aluminum interior  
**DL1W-SS** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Pass-Thru (consult factory)
Additional chrome plated steel shelves	Special electrical req. (consult factory)
Stainless steel shelves	<b>Correctional Facility Options</b>
Pan slide assemblies	<ul style="list-style-type: none"><li>One way security screws</li></ul>
Gasters	<ul style="list-style-type: none"><li>Locking hasp (lock not included)</li></ul>
Custom laminates	<ul style="list-style-type: none"><li>Stainless steel mesh cover</li></ul>
Half doors	<ul style="list-style-type: none"><li>Coverless hinges</li></ul>
Hinged glass door (consult factory)	

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

**Project Name:**

**Model Specified:**

**Location:**

**Item No:**

**Quantity:**

**AIA #:**

**SIS #:**

## Standard Model Features

### HEATING SYSTEM

Self contained, performance rated heating system  
90°F to 180°F temperature range  
Top mounted heating plenum "plug" with circulating fan  
Unique air flow distribution ducts

### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation  
Smooth, polished chrome workflow door handle  
Cam action, lift off hinges  
Self-closing door  
Magnetic snap in Santoprene™ door gasket  
Cylinder lock in door  
Heavy duty, chrome plated steel shelves  
Heavy duty pilaster strips  
Adjustable 6" stainless steel legs

### MODEL FEATURES

Automatic interior lighting  
Electronic controller with digital display & hi-low alarm  
Stainless steel strip heaters located in base of interior  
Rehinging of door (in the field)

**APPROVAL:**

## Model Specifications

### DIMENSIONAL DATA

Net Capacity (cubic feet)	21 (595 cu l)
Width, Overall (inches)	26 (660 mm)
Depth, Overall (inches) (including handle)	35 <sup>3</sup> / <sub>8</sub> (899 mm)
Depth (inches) (less door)	32 (813 mm)
Depth (inches) (door open 90°)	55 <sup>1</sup> / <sub>2</sub> (1410 mm)
Clear Door Width (inches)	19 <sup>3</sup> / <sub>8</sub> (492 mm)
Clear Door Height (inches)	58 <sup>5</sup> / <sub>8</sub> (1489 mm)
Height, Overall (inches) (including 6" legs)	83 <sup>1</sup> / <sub>4</sub> (2115 mm)
Number of Doors	1
Number of Shelves	3
Shelf Area (square feet)	20.4 (1.9 sq m)
Tray Slide Capacity	19

### ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	7.2 (7.2)
Total Wattage @ 208-230 volts	1500
10 ft. Cord/Plug (International)	No (No)

### SHIPPING DATA

Height - Crated (inches)	85 <sup>1</sup> / <sub>2</sub> (2172 mm)
Width - Crated (inches)	31 <sup>5</sup> / <sub>8</sub> (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu l)
Weight Std - Crated (pounds)	284 (129 kg)
Weight SS - Crated (pounds)	300 (136 kg)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

## Model Plan Views

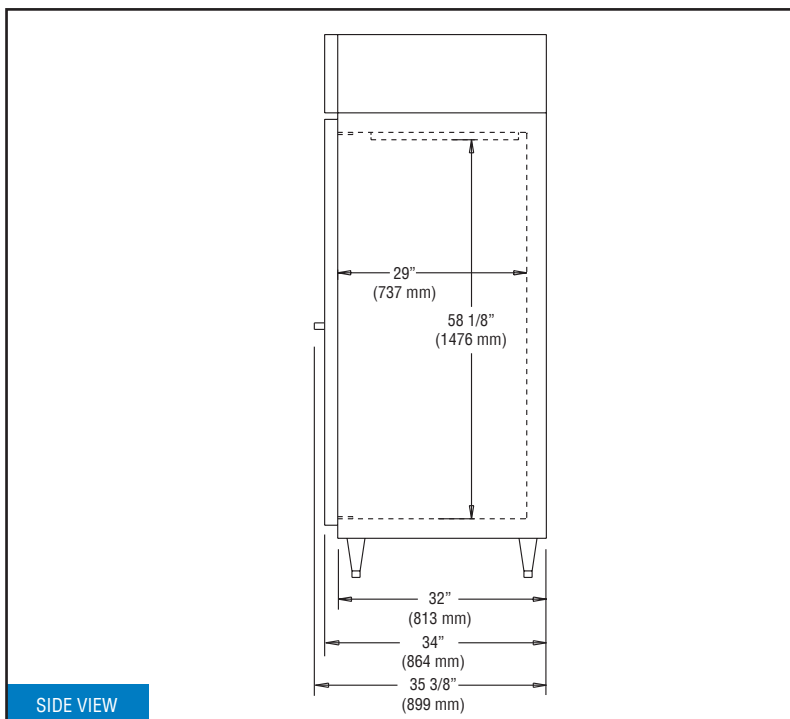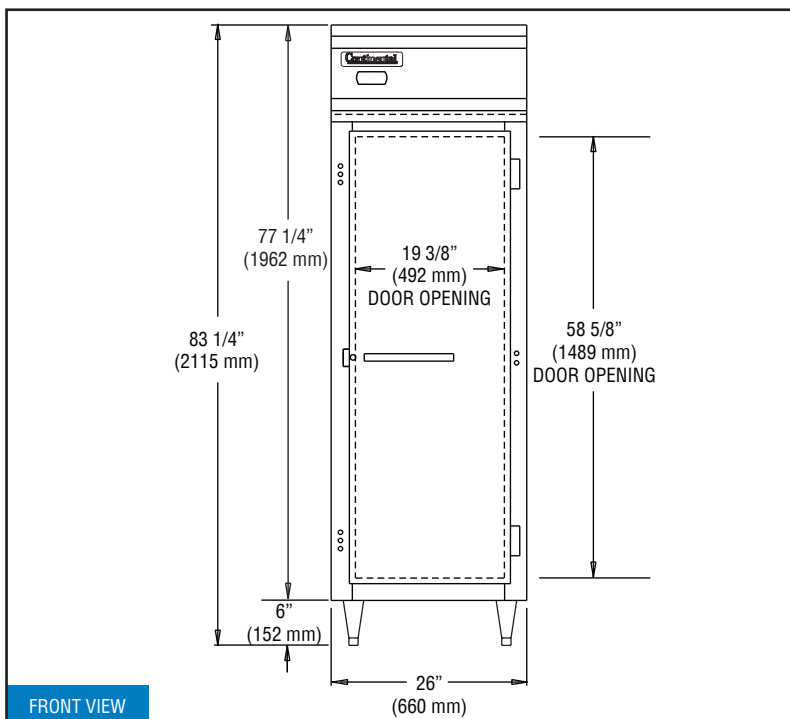

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

**Continental®**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 4/29/2022