DESIGNER LINE ROLL-IN WARMER

Model: DL1WI-E



1-Section Extra-High Roll-In Warmer with 72" Cart Capacity

DL1WI-E - Stainless steel front, aluminum end panels and interior

DL1WI-SA-E - Stainless steel exterior, aluminum interior

DL1WI-SS-E - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Roll-thru (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Rehinging of door (consult factory)	One way security screws	
Custom laminates	Locking hasp (lock not included)	
Half doors	Stainless steel mesh cover	
Special electrical req. (consult factory)	Coverless hinges	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Location.	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

HEATING SYSTEM

Self contained, performance rated "plug" heating system 90°F to 180°F temperature range

Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Magnetic snap in Santoprene™ door gasket

Cylinder lock in door

Self-closing door

72 ½" high door opening (72"H rack capacity*)

MODEL FEATURES

Electronic controller with digital display & hi-low alarm

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Removable stainless steel rack guides

Removable stainless steel ramp

Reinforced stainless steel floor

* Racks not supplied



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	34 (963 cu I)
Width, Overall (inches)	35 1/4 (895 mm)
Depth, Overall (inches) (including handle)	35 3/8 (899 mm)
Depth (inches) (less door)	32 (813 mm)
Depth (inches) (door open 90°)	65 (1651 mm)
Clear Door Width (inches)	27 3/8 (695 mm)
Clear Door Height (inches)	72 ½ (1842 mm)
Height, Overall (inches)	92 (2337 mm)
Number of Doors	1
Rack Capacity**	1

ELECTRICAL DATA


Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	7.3 (7.3)
Total Wattage @ 208-230 volts	1500
10 ft. Cord/Plug (International)	No (No)


SHIPPING DATA

Height - Crated (inches)	97 (2464 mm)
Width - Crated (inches)	43 (1092 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	98 (2489 cu I)
Weight Std - Crated (pounds)	360 (163 kg)
Weight SS - Crated (pounds)	420 (191 kg)

** Maximum rack size including wheels - 27"W x 29"D x 72"H
Figures in parentheses reflect metric equivalents rounded to the nearest
whole unit

Model Plan Views

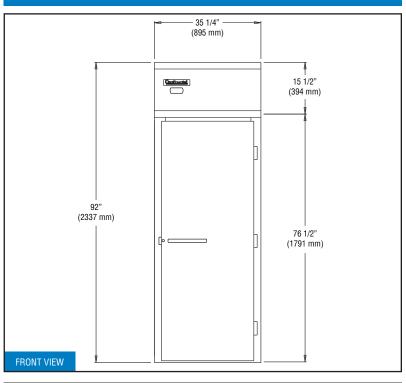

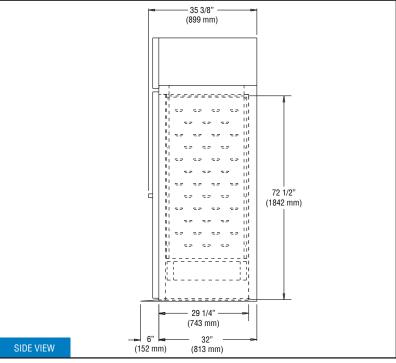

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.