

# DESIGNER LINE ROLL-IN WARMER

**Model: DL1WI**

*Designer line*

## 1-Section Roll-In Warmer with 66¼" Cart Capacity

**DL1WI** - Stainless steel front, aluminum end panels and interior  
**DL1WI-SA** - Stainless steel exterior, aluminum interior  
**DL1WI-SS** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Roll-thru (consult factory)
Chrome or stainless steel shelves	<b>Correctional Facility Options</b>
Rehinging of door (consult factory)	<ul style="list-style-type: none"> <li>One way security screws</li> </ul>
Custom laminates	<ul style="list-style-type: none"> <li>Locking hasp (lock not included)</li> </ul>
Half doors	<ul style="list-style-type: none"> <li>Stainless steel mesh cover</li> </ul>
Special electrical req. (consult factory)	<ul style="list-style-type: none"> <li>Coverless hinges</li> </ul>
Extra-high (consult factory)	

Consult factory for other model configurations, options and accessories.

**Continental**<sup>®</sup>  
Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### HEATING SYSTEM

Self contained, performance rated "plug" heating system  
 90°F to 180°F temperature range  
 Unique air flow distribution ducts

### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation  
 Smooth, polished chrome workflow door handle  
 Cam action, lift off hinges  
 Magnetic snap in Santoprene™ door gasket  
 Cylinder lock in door  
 Self-closing door  
 66 ½" high door opening (66 ¼"H rack capacity\*)

### MODEL FEATURES

Electronic controller with digital display & hi-low alarm  
 Cabinet upper side panels and refrigeration "plug" system  
 can be removed and reinstalled at job site  
 Removable stainless steel rack guides  
 Removable stainless steel ramp  
 Reinforced stainless steel floor

\* Racks not supplied

APPROVAL:

# Model Specifications

## DIMENSIONAL DATA

Net Capacity (cubic feet)	32 (906 cu l)
Width, Overall (inches)	35 1/4 (895 mm)
Depth, Overall (inches) (including handle)	35 3/8 (899 mm)
Depth (inches) (less door)	32 (813 mm)
Depth (inches) (door open 90°)	65 (1651 mm)
Clear Door Width (inches)	27 3/8 (695 mm)
Clear Door Height (inches)	66 1/2 (1676 mm)
Height, Overall (inches)	86 (2184 mm)
Number of Doors	1
Rack Capacity**	1

## ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	7.3 (7.3)
Total Wattage @ 208-230 volts	1500
10 ft. Cord/Plug (International)	No (No)

## SHIPPING DATA

Height - Crated (inches)	90 (2286 mm)
Width - Crated (inches)	43 (1092 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	94 (2661 cu l)
Weight Std - Crated (pounds)	360 (163 kg)
Weight SS - Crated (pounds)	420 (191 kg)

\*\* Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

# Model Plan Views

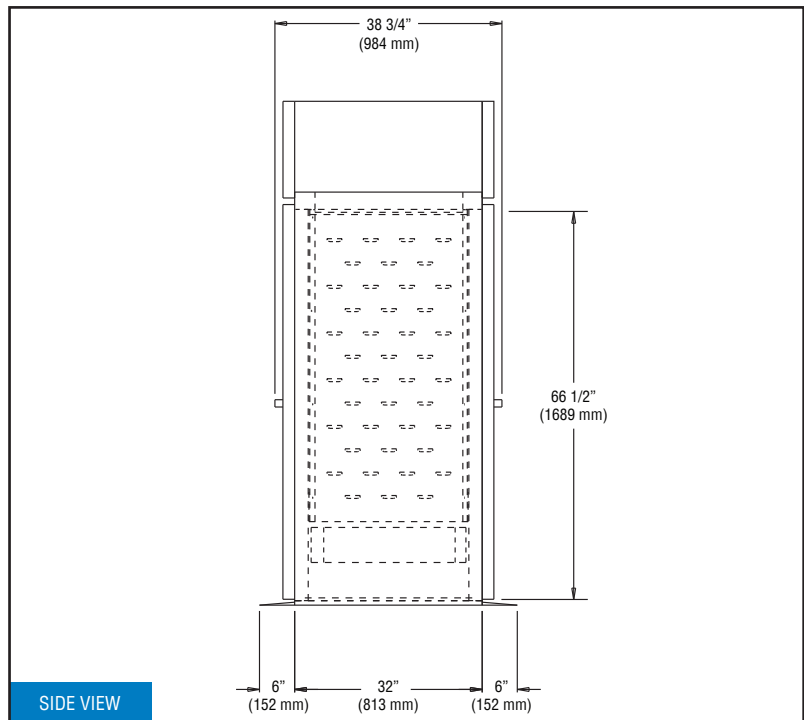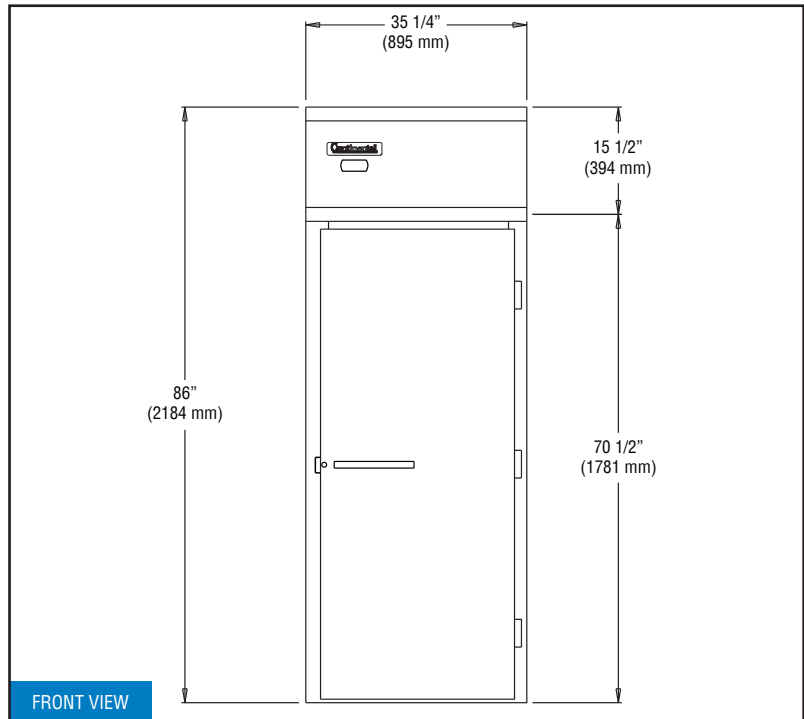

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

