

# DESIGNER LINE REFRIGERATOR/WARMER

**Model: DL2RWE-HD**



## 2-Section Extra-Wide Dual Temp, Reach-In Refrigerator/Warmer with Half Doors

Refrigerator (left)/Warmer (right). Sections can be changed at time of order.

- DL2RWE-HD** - Stainless steel front, aluminum end panels and interior
- DL2RWE-SA-HD** - Stainless steel exterior, aluminum interior
- DL2RWE-SS-HD** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Increased refrigeration systems
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Rehinging of doors (consult factory)	<b>Refrigerator Section Only</b>
Expansion valve system	Additional epoxy coated steel shelves
Pan slide assemblies	Wine Rack
Casters	<b>Correctional Facility Options</b>
Custom laminates	<ul style="list-style-type: none"> <li>• One way security screws</li> </ul>
Full doors	<ul style="list-style-type: none"> <li>• Locking hasp (lock not included)</li> </ul>
Hinged glass doors (consult factory)	<ul style="list-style-type: none"> <li>• Stainless steel mesh cover</li> </ul>
Pass-Thru (consult factory)	<ul style="list-style-type: none"> <li>• Coverless hinges</li> </ul>

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATOR SECTION

Separate, self-contained, performance rated "plug" refrigeration system

Environmentally safe R-134a refrigerant

(3) heavy duty, epoxy coated steel shelves

### WARMER SECTION

Separate, self-contained, performance rated heating system

90°F to 180°F temperature range

Top mounted heating plenum "plug" with circulating fan

Stainless steel strip heaters located in base of interior

(3) Heavy duty, chrome plated steel shelves

### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty pilaster strips

Adjustable 6" stainless steel legs

### MODEL FEATURES

Unique air flow distribution ducts

Automatic interior lighting

(2) Electronic controllers with digital display & hi-low alarm

Automatic, hot gas condensate evaporator

Refrigeration/heating system is readily accessible on top of cabinet, separate from the "food zone"

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled on job site

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA [R/W]

Net Capacity (cubic feet)	22/22 (623/623 cu l)
Width, Overall (inches)	57 (1448 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	58 (1473 mm)
Clear Door Width (inches)	21 7/8 (556 mm)
Clear Half Door Height (inches)	27 1/2 (699 mm)
Height, Overall (inches) (including 6" legs)	83 1/4 (2115 mm)
Number of Doors	4
Number of Shelves	6
Shelf Area (square feet)	40.8 (3.8 sq m)
Tray Slide Capacity (refrigerator)	11 (per half section)
Tray Slide Capacity (warmer)	9 (top) 6 (bottom)

### REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	1940

### ELECTRICAL DATA [R/W]

Voltage [R] (International)	115/60/1 (220/50/1)
Voltage [W]	208-230/60/1
Feed Wires (including ground)	3/3
Total Amps (International)	5.5 (5.5)/7.2 (7.2)
Total Wattage @ 208-230 volts	2250
10 ft. Cord/Plug (International)	Yes (No)/No

### SHIPPING DATA



Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	64 (1626 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	133 (3766 cu l)
Weight Std - Crated (pounds)	580 (263 kg)
Weight SS - Crated (pounds)	610 (277 kg)

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

**Refrigerator Section Only:**  
Equipped with one NEMA-5-15P Plug (varies by country)



## Model Plan Views

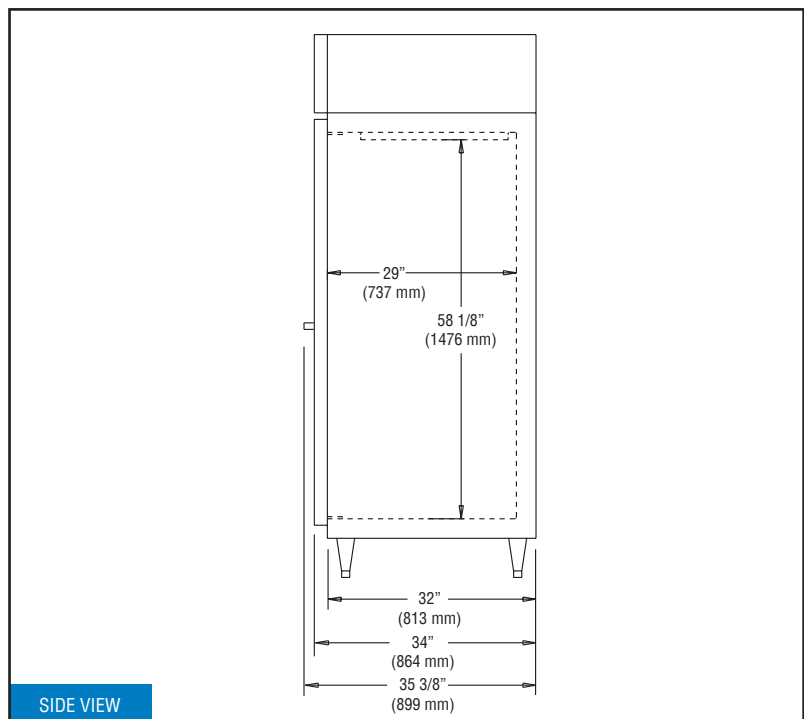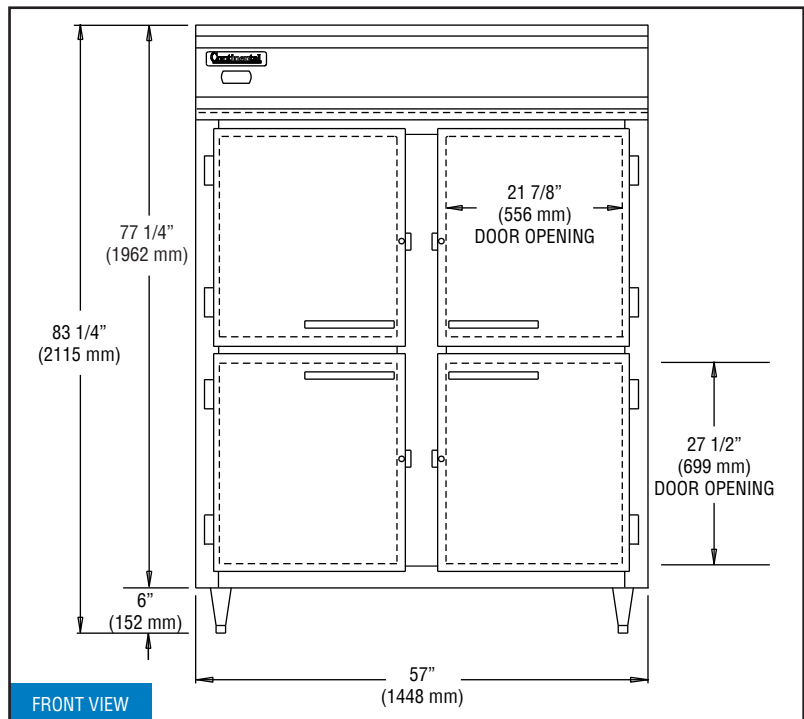

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 4/29/2022