

DESIGNER LINE ROLL-THRU WARMER

Model: DL2WI-RT



2-Section Roll-Thru Warmer with 66¼” Cart Capacity

- DL2WI-RT - Stainless steel front, aluminum end panels and interior
- DL2WI-SA-RT - Stainless steel exterior, aluminum interior
- DL2WI-SS-RT - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Chrome or stainless steel shelves	Roll-in (consult factory)
Rehinging of door (consult factory)	Correctional Facility Options
Custom laminates	<ul style="list-style-type: none"> • One way security screws
Half doors	<ul style="list-style-type: none"> • Locking hasp (lock not included)
Special electrical req. (consult factory)	<ul style="list-style-type: none"> • Stainless steel mesh cover
Extra-high (consult factory)	<ul style="list-style-type: none"> • Coverless hinges

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

HEATING SYSTEM

- Self contained, performance rated “plug” heating system
- 90°F to 180°F temperature range
- Unique air flow distribution ducts

CABINET ARCHITECTURE

- 3” non-CFC polyurethane foam insulation
- Smooth, polished chrome workflow door handles
- Cam action, lift off hinges
- Magnetic snap in Santoprene™ door gaskets
- Cylinder lock in each door
- Self-closing doors
- 66 ½” high door opening (66 ¼”H rack capacity*)

MODEL FEATURES

- Electronic controller with digital display & hi-low alarm
- Cabinet upper side panels and refrigeration “plug” system can be removed and reinstalled at job site
- Removable stainless steel rack guides
- Removable stainless steel ramps
- Reinforced stainless steel floor

* Racks not supplied



Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	64 (1812 cu l)
Width, Overall (inches)	68 1/2 (1740 mm)
Depth, Overall (inches) (including handles)	38 3/4 (984 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	98 (2489 mm)
Clear Door Width (inches)	27 3/8 (695 mm)
Clear Door Height (inches)	66 1/2 (1676 mm)
Height, Overall (inches)	86 (2184 mm)
Number of Doors	4
Rack Capacity** (per section)	2

ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	13.9 (13.9)
Total Wattage @ 208-230 volts	3000
10 ft. Cord/Plug (International)	No (No)

SHIPPING DATA

Height - Crated (inches)	90 (2286 mm)
Width - Crated (inches)	77 (1956 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	168 (4757 cu l)
Weight Std - Crated (pounds)	720 (327 kg)
Weight SS - Crated (pounds)	820 (372 kg)

** Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

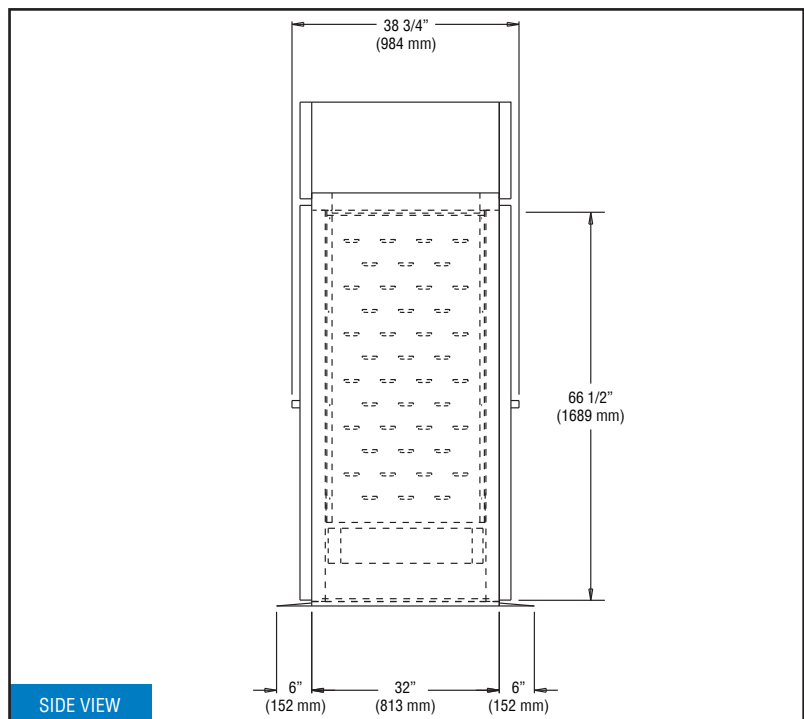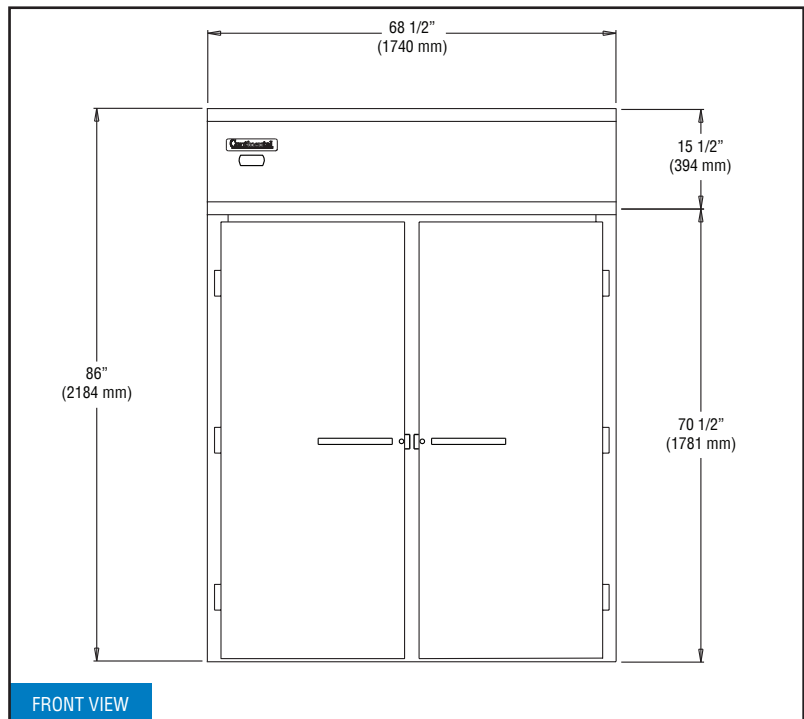

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides.



Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

