DISPLAY FREEZER (0°F)

Model: DL3FE-GD-HD



3-Section Extra-Wide Display Reach-In Freezer with Hinged Glass Doors

DL3FE-GD-HD - Stainless steel front, aluminum end panels and interior DL3FE-SA-GD-HD - Stainless steel exterior, aluminum interior D3LFE-SS-GD-HD - Stainless steel exterior and interior



Options and Accessories

| (upcharge and lead times may apply) | |
|---------------------------------------|---|
| Stainless steel case back | Casters |
| Additional epoxy coated steel shelves | Full doors |
| Chrome or stainless steel shelves | Special electrical req. (consult factory) |
| Rehinging of doors (consult factory) | Shallow depth (consult factory) |
| Pan slide assemblies | Pass-thru (consult factory) |
| Solid doors (consult factory) | Increased refrigeration system |

Consult factory for other model configurations, options and accessories.

| Project Name: | | |
|------------------|-----------|--|
| | | |
| Model Specified: | | |
| | | |
| Location: | | |
| | | |
| Item No: | Quantity: | |
| | | |
| AIA #: | SIS #: | |

Standard Model Features

REFRIGERATION SYSTEM

| Self contained, performance rated "plug" refrigeration system |
|---|
| Environmentally-safe R-404A refrigerant |
| Refrigeration system is readily accessible on top of cabinet, separate from the "food zone" |
| Automatic, hot gas condensate evaporator |
| Expansion valve system |
| |

CABINET ARCHITECTURE

| 3" non-CFC polyurethane foam insulation |
|--|
| Triple-pane, tempered hinged glass doors |
| Chrome-plated handles |
| Cam action, lift-off hinges |
| Self-closing doors |
| Magnetic snap in door gaskets |
| Cylinder lock in each door |
| Heavy duty, epoxy coated steel shelves |
| Heavy duty pilaster strips |
| Adjustable 6" stainless steel legs |
| |

MODEL FEATURES

LED interior lightingTop and side air distribution ductsAutomatic electric defrostCabinet upper side panels and refrigeration "plug"
system can be removed and reinstalled at job site

Electronic controller with digital display & hi-low alarm



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications DIMENSIONAL DATA Net Capacity (cubic feet) 73 (2067 cu l) Width, Overall (inches) 85 ½ (2172 mm) Depth, Overall (inches) 35 3/8 (899 mm) (including handles)

| Depth (inches) (less doors) | 32 (813 mm) |
|--|-----------------|
| Depth (inches) (doors open 90°) | 58 (1473 mm) |
| Clear Door Width (inches) | 21 7⁄8 (556 mm) |
| Clear Half Door Height (inches) | 27 ½ (699 mm) |
| Height, Overall (inches) (including 5" casters) | 82 ¼ (2089 mm) |
| Number of Doors | 6 |
| Number of Shelves | 12 |
| Shelf Area (square feet) | 61.2 (5.7 sq m) |
| Tray Slide Capacity (per half section) | 11 |

REFRIGERANT DATA

| Capacity (BTU per hour)* 6050 | Condensing Unit Size (H.P.) | 2 1⁄2 |
|-------------------------------|-----------------------------|-------|
| | Capacity (BTU per hour)* | 6050 |

ELECTRICAL DATA

| Voltage (International) | 115/208-230/60/1 (220/50/1) |
|--|--------------------------------|
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 22.5 (19.5) |
| Defrost Amps (International) | 9.6 (4.8) |
| 10 ft. Cord/Plug [attached] (International) | No (No) |
| SHIPPING DATA | |
| Height - Crated (inches) | 85 ½ (2172 mm) |
| Width - Crated (inches) | 90 (2286 mm) |
| | |

| Depth - Crated (inches) | 42 (1067 mm) |
|------------------------------|-----------------|
| Volume - Crated (cubic feet) | 181 (5125 cu l) |
| Weight Std - Crated (pounds) | 800 (363 kg) |
| Weight SS - Crated (pounds) | 840 (381 kg) |
| | |

* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Due to our continued efforts in developing innovative products, specifications subject to change without notice.





539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

PROUDLY **DESIGNED & ASSEMBLED**

IN THE U.S.A.

Model Plan Views

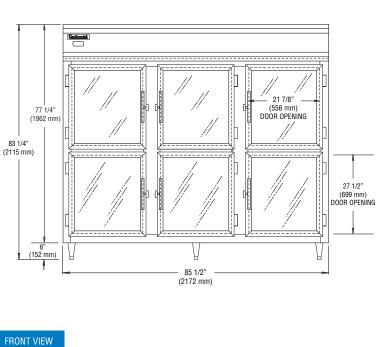

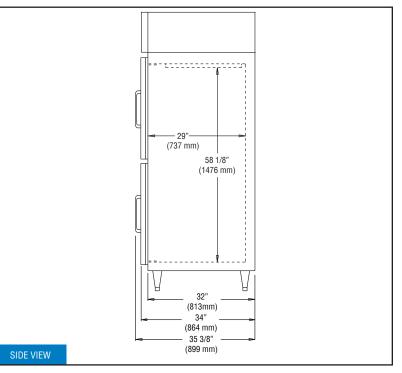

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.