

DISPLAY FREEZER (0°F)

Model: DL3FE-GD

Designer-line

3-Section Extra-Wide Display Reach-In Freezer with Hinged Glass Doors

DL3FE-GD - Stainless steel front, aluminum end panels and interior
DL3FE-SA-GD - Stainless steel exterior, aluminum interior
DL3FE-SS-GD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Casters
Additional epoxy coated steel shelves	Full doors
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Rehinging of doors (consult factory)	Shallow depth (consult factory)
Pan slide assemblies	Pass-thru (consult factory)
Solid doors (consult factory)	Increased refrigeration system

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated "plug" refrigeration system
 Environmentally-safe R-404A refrigerant
 Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"
 Automatic, hot gas condensate evaporator
 Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
 Triple-pane, tempered hinged glass doors
 Chrome-plated handles
 Cam action, lift-off hinges
 Self-closing doors
 Magnetic snap in door gaskets
 Cylinder lock in each door
 Heavy duty, epoxy coated steel shelves
 Heavy duty pilaster strips
 Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting
 Top and side air distribution ducts
 Automatic electric defrost
 Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site
 Electronic controller with digital display & hi-low alarm

APPROVAL:

Continental
Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	73 (2067 cu l)
Width, Overall (inches)	85 1/2 (2172 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	58 (1473 mm)
Clear Door Width (inches)	21 7/8 (556 mm)
Clear Half Door Height (inches)	27 1/2 (699 mm)
Height, Overall (inches) (including 5" casters)	82 1/4 (2089 mm)
Number of Doors	3
Number of Shelves	12
Shelf Area (square feet)	61.2 (5.7 sq m)
Tray Slide Capacity (per half section)	11

REFRIGERANT DATA

Condensing Unit Size (H.P.)	2 1/2
Capacity (BTU per hour)*	6050

ELECTRICAL DATA



Voltage (International)	115/208-230/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	22.5 (19.5)
Defrost Amps (International)	9.6 (4.8)
10 ft. Cord/Plug [attached] (International)	No (No)

SHIPPING DATA

Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	181 (5125 cu l)
Weight Std - Crated (pounds)	800 (363 kg)
Weight SS - Crated (pounds)	840 (381 kg)

* Rating @ -15°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

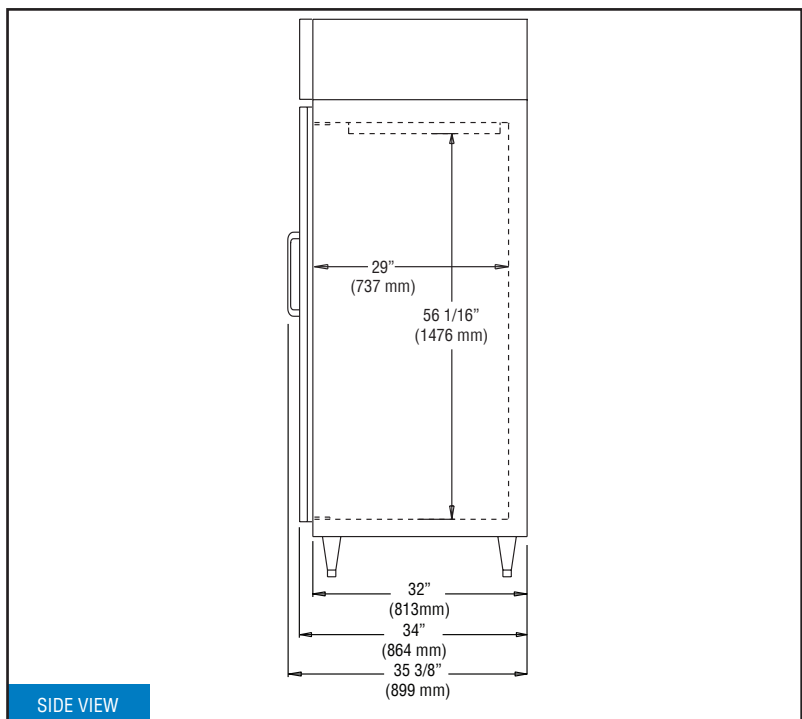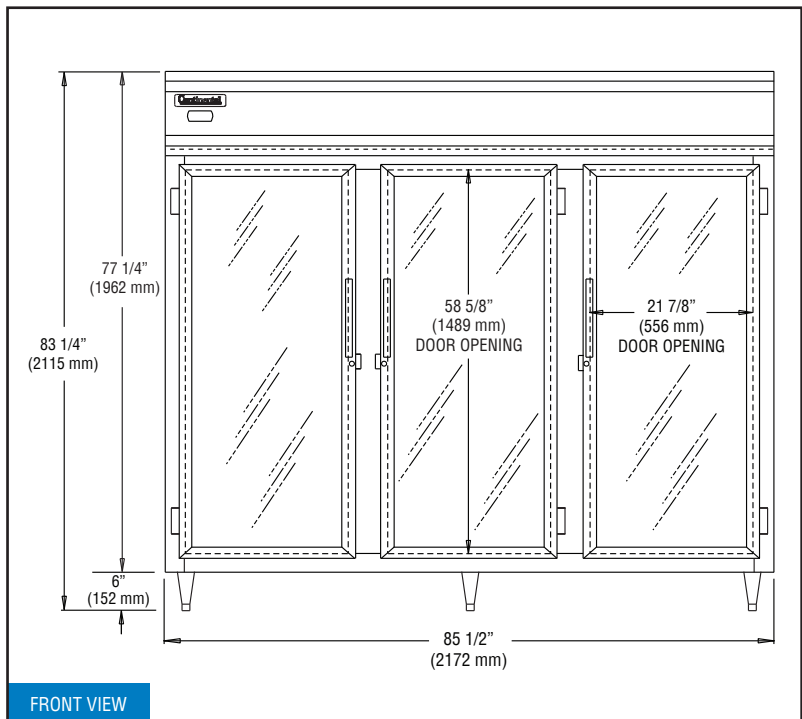

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

