DESIGNER LINE WARMER

Model: DL3W-PT-HD



3-Section Pass-Thru Warmer with Half Doors

DL3W-PT-HD - Stainless steel front, aluminum end panels and interior

DL3W-PT-SA-HD - Stainless steel exterior, aluminum interior

DL3W-PT-SS-HD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

(aponargo ana roa	a times may approx
Stainless steel case back	Rehinging of doors (consult factory)
Additional chrome plated steel shelves	Special electrical req. (consult factory)
Stainless steel shelves	Correctional Facility Options
Pan slide assemblies	One way security screws
Casters	Locking hasp (lock not included)
Custom laminates	Stainless steel mesh cover
Full door	Coverless hinges
Hinged glass doors (consult factory)	

Consult factory for other model configurations, options and accessories

Project Name:		
Model Specified:		
Location:		
Location.		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

HEATING SYSTEM

Self contained, performance rated heating system
90°F to 180°F temperature range
Top mounted heating plenum "plug" with circulating fan
Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, chrome plated steel shelves

Heavy duty pilaster strips

MODEL FEATURES

Adjustable 6" stainless steel legs

Automatic interior lighting

Electronic controller with digital display & hi-low alarm

Stainless steel strip heaters located in base of interior



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

DIMENDIONAL DATA	
Net Capacity (cubic feet)	72 (2039 cu I)
Width, Overall (inches)	78 (1981 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	55 ½ (1410 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 6" legs)	83 ½ (2115 mm)
Number of Doors	3
Number of Shelves	9
Shelf Area (square feet)	61.2 (5.7 sq m)
Tray Slide Capacity (per top sections)	9
Tray Slide Capacity (per bottom sections)	6

ELECTRICAL DATA


Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	13.9 (13.9)
Total Wattage @ 208-230 volts	3000
10 ft. Cord/Plug (International)	No (No)


SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	187 (5295 cu I)
Weight Std - Crated (pounds)	650 (295 kg)
Weight SS - Crated (pounds)	685 (311 kg)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

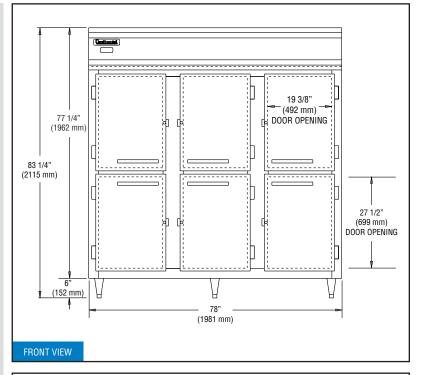

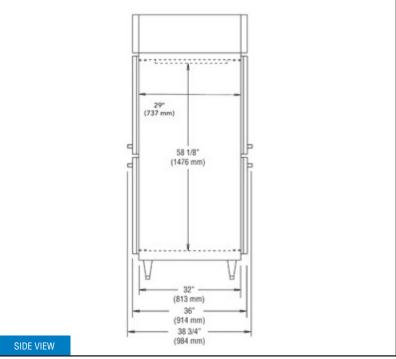

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.