

DISPLAY FREEZER (0°F)

Model: 2FE-GD-HD

2-Section Extra-Wide Display Reach-In Freezer with Half Hinged Glass Doors

2FE-GD-HD - Stainless steel front, aluminum end panels and interior
 2FE-SA-GD-HD - Stainless steel exterior, aluminum interior
 2FE-SS-GD-HD - Stainless steel exterior and interior
 Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Pan slide assemblies
Add'l epoxy-coated steel shelves	Full glass doors
Chrome or stainless steel shelves	Pass-thru (consult factory)
Heavy-duty pilaster strips	Solid door (full or half doors)
Rehinging of doors (consult factory)	Special electrical req. (consult factory)
Adjustable legs	

Consult factory for other model configurations, options and accessories.

Continental[®]
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-404A refrigerant
 Self contained, performance-rated refrigeration system
 Automatic, electric condensate evaporator
 Thermal expansion valve

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
 Chrome-plated handles
 Cam action, lift off hinges
 Self-closing doors
 Magnetic snap-in door gaskets
 Cylinder lock in each door
 Heavy-duty, epoxy-coated steel shelves
 Triple-pane, tempered hinged glass doors
 5" casters

MODEL FEATURES

LED interior lighting
 Electronic controller w/digital display & hi-low alarm
 Automatic electric defrost

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	50 (1416 cu l)
Width, Overall (in.)	57 (1448 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	58 (1473 mm)
Clear Door Width (in.)	21 7/8 (556 mm)
Clear Door Height (in.)	58 5/8 (1489 mm)
Height, Overall (in.) (incl. 5" casters)	85 3/4 (2178 mm)
No. of Doors	4
No. of Shelves	8
Shelf Area (sq. ft.)	40.8 (3.8 sq m)
Tray Slide Capacity (per section)	24

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1
Capacity (BTU/Hr)*	4325

ELECTRICAL DATA

Voltage (int'l)	115/208-230/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	14.0 (11.6)
Defrost Amps (int'l)	9.6 (4.8)
10 ft. Cord/Plug [attached] (int'l)	No (No)



SHIPPING DATA (CRATED)

Height (in.)	89 (2261 mm)
Width (in.)	64 (1626 mm)
Depth (in.)	42 (1067 mm)
Volume (cu. ft.)	133 (3766 cu l)
Weight Std (lbs.)	610 (277 kg)
Weight -SS (lbs.)	640 (290 kg)

Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

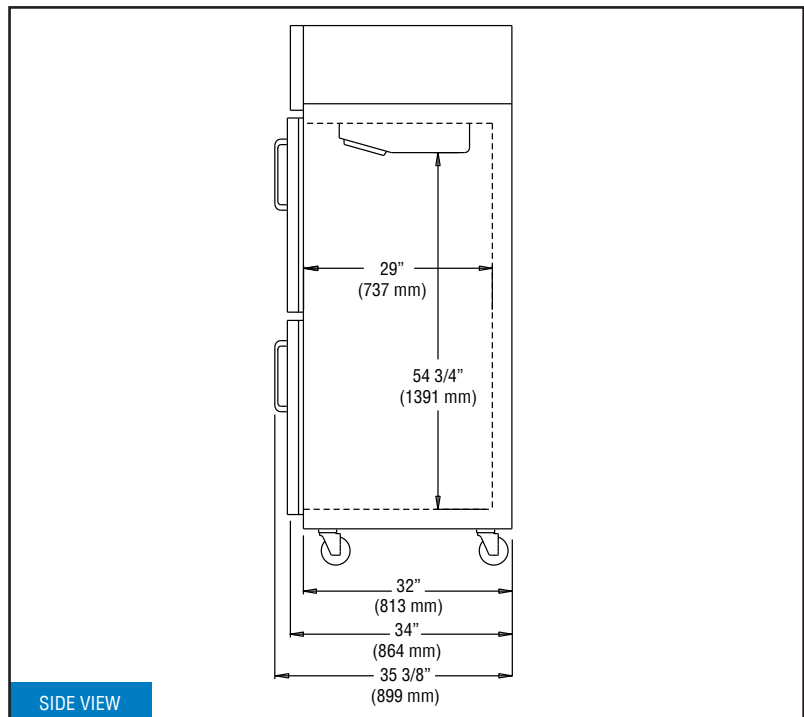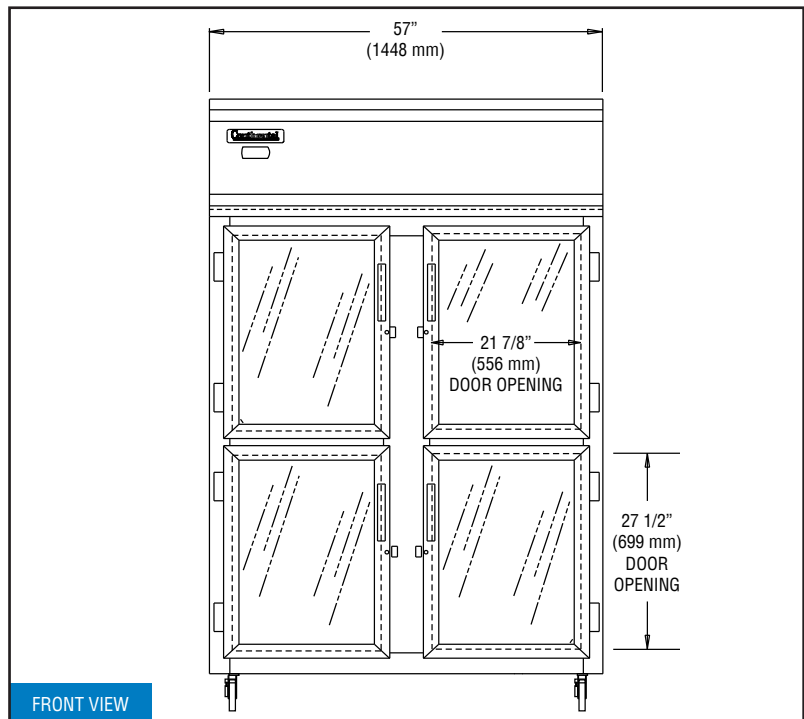

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunkserry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2018. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.