

# DESIGNER LINE SANDWICH UNIT

## Model: D60N8C-FB

Natural Refrigerant R-290 Model

*Designer Line*

### 60" Cutting Top Sandwich Unit Refrigerator with Solid Door - 8 Pans Front Breathing

Stainless steel front, top and end panels and interior.



#### Options and Accessories

(upcharge and lead times may apply)

|                                  |                            |
|----------------------------------|----------------------------|
| Stainless steel back             | Rear-mounted cutting board |
| Overshelves (single or double)   | Composite cutting board    |
| Add'l epoxy-coated steel shelves | Flat insulated night cover |
| Stainless steel shelves          | Vision panel lid           |
| Door locks                       | Modified pan openings      |

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

#### Standard Model Features

##### REFRIGERATION SYSTEM

- Performance-rated refrigeration system
- Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>
- Unique air flow distribution allows pan product to maintain 33° - 41°F
- Automatic, hot gas condensate evaporator
- Non-corrosive, plasticized fin evaporator coil
- Easily serviceable, back mounted compressor
- Expansion valve system

##### CABINET ARCHITECTURE

- 2" non-CFC polyurethane foam insulation
- Smooth, polished chrome door handles
- Spring loaded, self closing doors
- Magnetic snap-in door gaskets
- Heavy-duty, epoxy-coated steel shelves
- 19" deep, full length nylon cutting board
- Insulated lid
- Completely enclosed, vented and removable case back
- 3 3/4" casters

##### MODEL FEATURES

- (8) 1/6 size recessed pans, 4" deep
- Removable interior tub below pans
- Electronic controller w/digital display & hi-low alarm
- Field rehingeable doors

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space. For proper operation, the area under and in front of the cabinet must not be obstructed in any way.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|   |                 |
|---|-----------------|
| Net Capacity (cu. ft.)                                  | 17.0 (481 cu l) |
| 1/6 Size Pans (4" deep)                                 | 8               |
| Width, Overall (in.)                                    | 60 (1524 mm)    |
| Depth, Overall (in.)<br>(incl. cutting board & bumpers) | 38 1/4 (972 mm) |
| Depth, Cutting Board (in.)                              | 19 (483 mm)     |
| Height, Overall (in.) (incl. 3 3/4" casters)            | 41 (1041 mm)    |
| Shelf Area (sq. ft.)                                    | 8.1 (.8 sq m)   |
| No. of Shelves  | 2               |
| No. of Doors  | 2               |
| Interior Depth (in.)                                    | See Drawing     |
| Interior Height (in.)                                   | 26 1/4 (667 mm) |
| Interior Width (in.)                                    | 56 (1422 mm)    |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/3+ |
| Capacity (BTU/Hr)*          | 2560 |

### ELECTRICAL DATA

|                                     |                     |
|-------------------------------------|---------------------|
| Voltage (int'l)                     | 115/60/1 (220/50/1) |
| Total Amps (int'l)                  | 5.8 (4.4)           |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No)            |

### SHIPPING DATA

|                       |                  |
|-----------------------|------------------|
| Weight (lbs.)         | 309 (140 kg)     |
| Height - Crated (in.) | 43 1/4 (1099 mm) |
| Width - Crated (in.)  | 68 (1727 mm)     |
| Depth - Crated (in.)  | 37 1/4 (946 mm)  |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)




Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2020. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

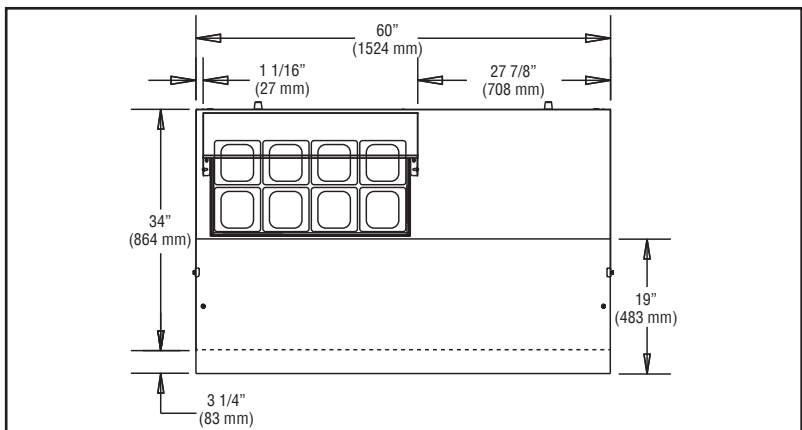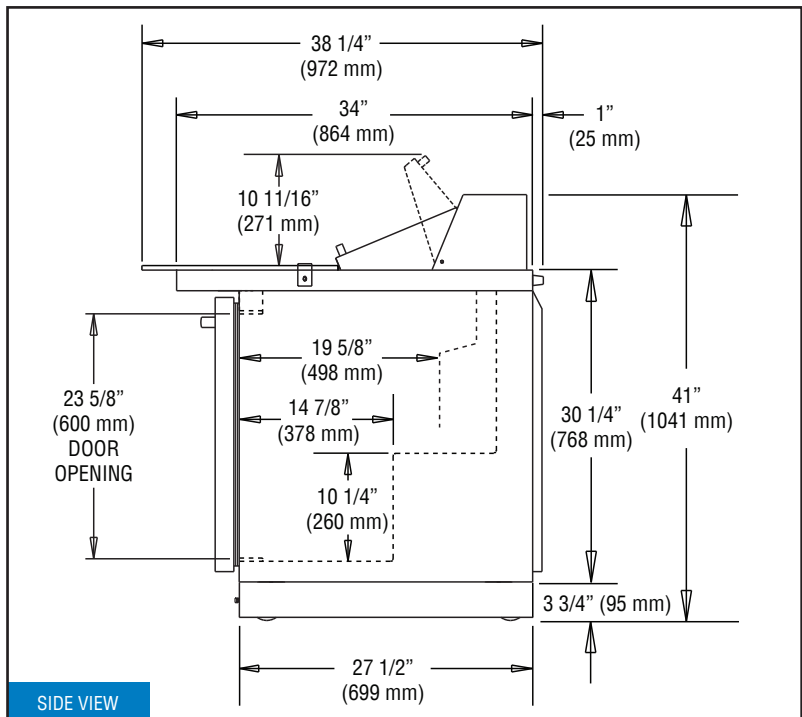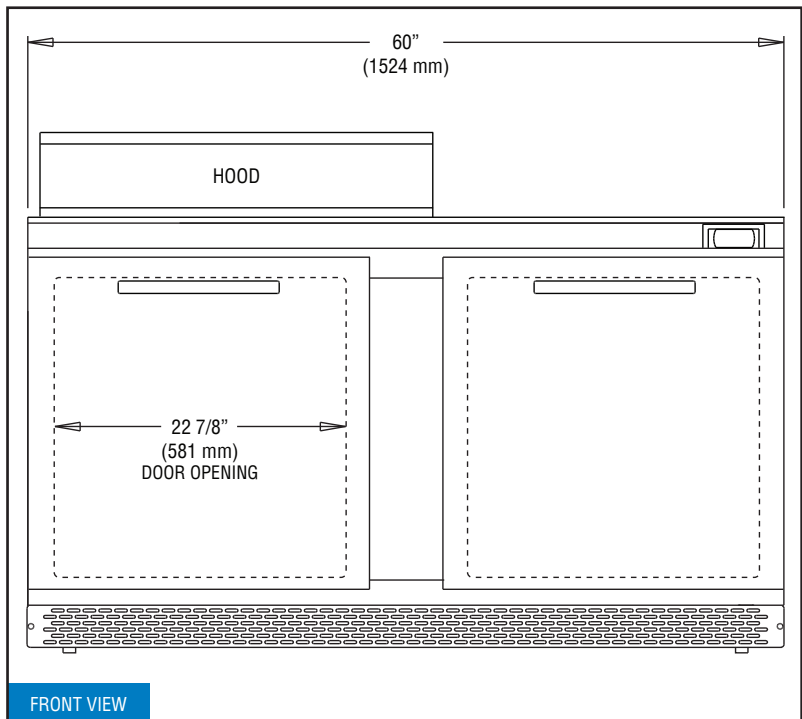

D60N8C-FB (4/27/20)