

# DESIGNER LINE ROLL-IN FREEZER

**Model: DL1FI-E**

*Designer Line*

## 1-Section Extra-High Roll-In Freezer with 72" Cart Capacity

**DL1FI-E** - Stainless steel front, aluminum end panels and interior  
**DL1FI-SA-E** - Stainless steel exterior, aluminum interior  
**DL1FI-SS-E** - Stainless steel exterior and interior



### Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Increased refrigeration systems
Epoxy-coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	<b>Correctional Facility Options</b>
Rehinging of door (consult factory)	<ul style="list-style-type: none"> <li>One way security screws</li> </ul>
Expansion valve system	<ul style="list-style-type: none"> <li>Locking hasp (lock not included)</li> </ul>
Custom laminates	<ul style="list-style-type: none"> <li>Stainless steel mesh cover</li> </ul>
Half doors	<ul style="list-style-type: none"> <li>Coverless hinges</li> </ul>

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system

Environmentally-safe R-404A refrigerant

Refrigeration system is accessible on top of cabinet, separate from the "food zone"

Top and side air distribution ducts

Automatic, hot gas condensate evaporator

#### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Magnetic snap-in door gasket

Cylinder lock in door

Self-closing door

72 1/2" high door opening (72"H rack capacity\*)

#### MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

Removable stainless steel rack guides

Removable stainless steel ramp

Reinforced stainless steel floor

Automatic electric defrost

\* Rack not supplied

**IMPORTANT NOTE:** Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at installation site where space limitations are confining.

**Continental**  
 Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

Net Capacity (cu. ft.)	34 (963 cu l)
Width, Overall (in.)	35 1/4 (895 mm)
Depth, Overall (in.) (incl. handle)	35 3/8 (899 mm)
Depth (in.) (less door)	32 (813 mm)
Depth (in.) (door open 90°)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	72 1/2 (1842 mm)
Height, Overall (in.)	92 (2337 mm)
No. of Doors	1
Rack Capacity**	1

### REFRIGERANT DATA

Condensing Unit Size (H.P.)	3/4
Capacity (BTU/Hr)*	3530

### ELECTRICAL DATA

Voltage (int'l)	115/208-230/60/1 (220/50/1)
Feed Wires (incl. ground)	4
Total Amps (int'l)	10.9 (10.2)
Defrost Amps (int'l)	9.6 (4.8)
10 ft. Cord/Plug (int'l)	No (No)

### SHIPPING DATA

Height - Crated (in.)	97 (2464 mm)
Width - Crated (in.)	43 (1092 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	98 (2489 cu l)
Weight Std - Crated (lbs.)	475 (215 kg)
Weight SS - Crated (lbs.)	500 (227 kg)

\* Rating @ -15°F evaporator, 90°F ambient

\*\* Maximum rack size including wheels - 27"W x 29"D x 72"H

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)



Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2019, Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

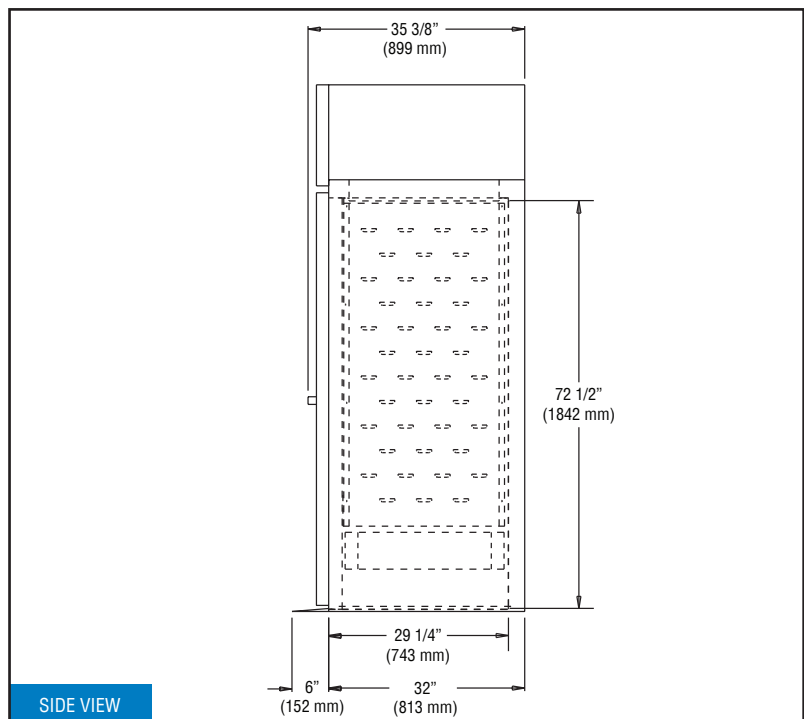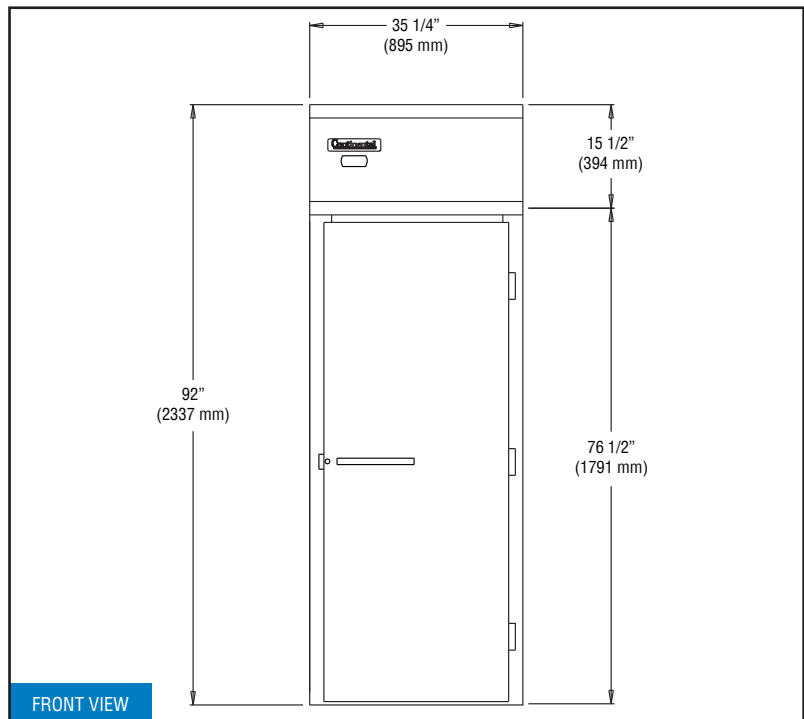

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.