

DESIGNER LINE ROLL-IN WARMER

Model: DL2WI

Designer Line

2-Section Roll-In Warmer with 66 1/4" Cart Capacity

DL2WI - Stainless steel front, aluminum end panels and interior
DL2WI-SA - Stainless steel exterior, aluminum interior
DL2WI-SS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Rehinging of doors (consult factory)	<ul style="list-style-type: none"> One way security screws
Custom laminates	<ul style="list-style-type: none"> Locking hasp (lock not included)
Half doors	<ul style="list-style-type: none"> Stainless steel mesh cover
Roll-Thru	<ul style="list-style-type: none"> Coverless hinges
Hinged glass doors	

Consult factory for other model configurations, options and accessories.

Continental[®]
Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

HEATING SYSTEM

Self-contained, performance-rated "plug" heating system
 90°F - 180°F temperature range
 Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
 Smooth, polished chrome workflow door handles
 Cam action, lift off hinges
 Magnetic snap-in door gaskets
 Cylinder lock in each door
 Self-closing doors
 66 1/2" high door openings (66 1/4"H rack capacity*)

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm
 Removable stainless steel rack guides
 Removable stainless steel ramps
 Reinforced stainless steel floor

* Racks not supplied

IMPORTANT NOTE: Cabinet upper side panels and heating "plug" system can be removed and reinstalled at installation site where space limitations are confining.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	64 (1812 cu l)
Width, Overall (in.)	68 1/2 (1740 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Door Height (in.)	66 1/2 (1676 mm)
Height, Overall (in.)	86 (2184 mm)
No. of Doors	2
Rack Capacity** (per section)	2

ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (incl. ground)	3
Total Amps (int'l)	13.8 (13.8)
Total Wattage @ 208-230 volts	3000
10 ft. Cord/Plug (int'l)	No (No)

SHIPPING DATA

Height - Crated (in.)	90 (2286 mm)
Width - Crated (in.)	77 (1956 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	168 (4757 cu l)
Weight Std - Crated (lbs.)	625 (283 kg)
Weight SS - Crated (lbs.)	660 (299 kg)

** Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

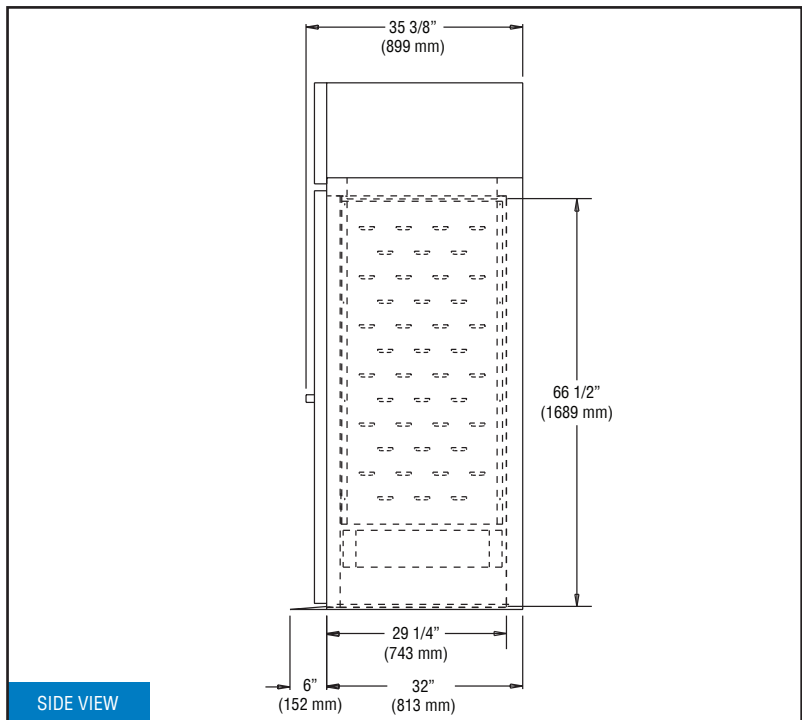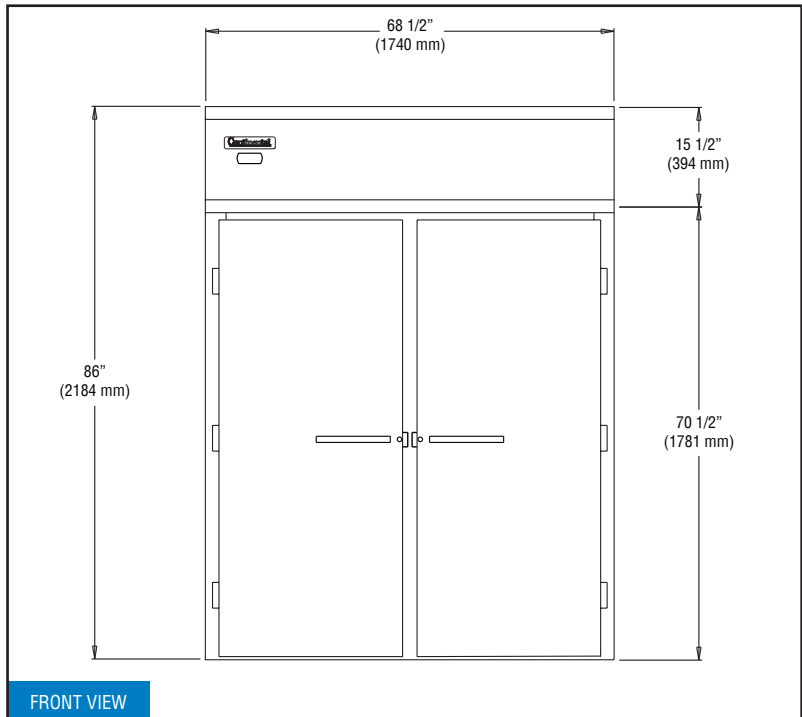

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunkserry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2019, Continental Refrigerator.
 A Division of National Refrigeration & Air Conditioning Products, Inc.