

Continental



Refrigerator

EXTRA-WIDE SLIDING GLASS DOOR DISPLAY REFRIGERATOR

Utilizing Environmentally Safe, CFC-free R-134a Refrigerant



2RE-SGD

Standard Features

- Modern, State-of-the-Art Styling Performance Rated Refrigeration System Utilizing Environmentally Safe R-134a Refrigerant
- 3" Non-CFC Polyurethane Foam Insulation
- Self-Closing Doors
- Cylinder Lock in Each Door
- Automatic Electric Condensate Evaporator
- 5" Casters
- Heavy Duty, Epoxy-Coated Steel Shelves
- External Dial Thermometer
- Double-Pane, Tempered Sliding Glass Doors
- Fluorescent Interior Lighting

Standard (S/S Front, Aluminum End Panels & Interior
Suffix SA (S/S Exterior, Aluminum Interior
Suffix SS (S/S Exterior & Interior)

Optional Features & Accessories

- Half Door
- Pass-Thru (Glass One Side Only)
- Remote
- Shallow Depth
- Legs
- Stainless Steel Case Back
- Extra Shelves
- Stainless Steel Shelves
- Digital Thermometer
- Increased Refrigeration Systems



c





REFRIGERATOR

**SPECIFICATIONS
DIMENSIONAL DATA**

**2RE-SGD
Reach-In**

**2RE-SGD-PT
Pass-Thru
(GLASS ONE SIDE ONLY)**

Net Capacity (cu. ft.)	50	50
Width, Overall (in.)	57	57
Depth, Overall (Incl. Hdl.) (in.)	34	36
Depth (Less Door(s) (in.)	32	32
Clear Door Width (in.)	21 ⁷ / ₈	21 ⁷ / ₈
Clear Full-Door Height (in.)	58 ¹ / ₄	58 ¹ / ₄
Clear Half-Door Height (in.)	27	27
Height, Overall (Incl. 5" Casters)	82 ¹ / ₄	82 ¹ / ₄
No. of Full Door(s)	2	4
No. of Half Door(s)	4	8
No. of Shelves	8	8
Shelf Area (sq. ft.)	40.8	40.8
Tray Slide Capacity (Half)	12 ea.	12 ea.
Tray Slide Capacity (Full)	24 ea.	24 ea.

REFRIGERATION DATA

Condensing Unit Size (H.P.)	¹ / ₂	¹ / ₂
Capacity (BTU/Hr)*	4010	4010

ELECTRICAL DATA

Cabinet Specifications	115/60/1	115/60/1
Feed Wires (Incl. Ground)	3	3
Condensing Unit Specs.	115/60/1	115/60/1
Total Amperes	13.6	14.3
Cabinet Amperes	4.1	4.8
Defrost Amperes	-	-
Power Supply Cord	yes	yes



SHIPPING DATA

Height – crated (in.)	81 ¹ / ₂	81 ¹ / ₂
Width – crated (in.)	55	55
Depth – crated (in.)	37	37
Volume – crated (cu.ft.)	97	97
Weight Std – crated (lbs.)	530	610
Weight SS – crated (lbs.)	610	680
Weight Std – uncrated (lbs.)	360	430
Weight SS – uncrated (lbs.)	440	510

* Rating @ +25°F Evaporator, 90° Ambient

Note: All specifications subject to change without notice.

Note: If the cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

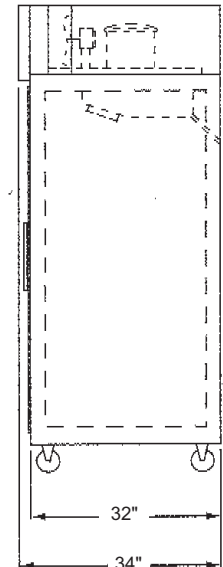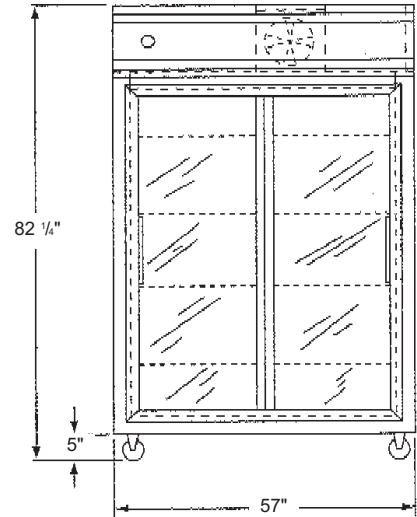

A Division of National Refrigeration & A/C Products, Inc.
539 Dunksferry Road Bensalem, PA 19020
(800) 523-7138 Fax: (215) 244-9579
www.continentalrefrigerator.com