

# BACK BAR EQUIPMENT

## Model: **KC59NSS**

Natural Refrigerant R-290 Model

### 59" Keg Cooler

Stainless steel exterior, countertop, interior back and side panels with reinforced stainless steel floor.



#### Options and Accessories

(upcharge and lead times may apply)

|   |                               |
|---|-------------------------------|
| Epoxy-coated or stainless steel shelves             | Faucet lock                   |
| Glass doors in lieu of solid doors                  | Riser base* (field installed) |
| Food storage rated stainless steel interior (NSF-7) | Condensing unit on right      |
| Single, dual or triple faucets                      | Wine rack                     |
| Tower placement (consult factory)                   | Castors or legs               |

Consult factory for other model configurations, options and accessories.

\* Adding a Riser Base increases overall height 2"

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

#### Standard Model Features

##### REFRIGERATION SYSTEM

Performance-rated front breathing refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

##### CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation

Front, rear and side venting louvered grills

Magnetic snap-in door gaskets

Cylinder-keyed security lock in each door

Stainless steel reinforced threshold

##### MODEL FEATURES

Low profile cabinet design

Electronic controller w/digital display & hi-low alarm

LED interior lighting

Continuously cooled, 3" diameter beer column with lever faucet, CO<sub>2</sub> pressure relief distributor and CO<sub>2</sub> tubing with clamps

Easily removable stainless steel drip grate with convenient front-mounted cleanout drainage hose (pan not removable)

Easily accessible and serviceable slide-out condensing unit

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

**Continental**<sup>®</sup>  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
www.continentalrefrigerator.com

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|   |                  |
|---|------------------|
| Net Capacity (cu. ft.)                            | 22 (623 cu l)    |
| Width, Overall (in.)                              | 59 (1499 mm)     |
| Depth, Overall (in.)<br>(incl. handles & bumpers) | 29 3/16 (741 mm) |
| Depth, Body Only (in.) (less doors)               | 25 (635 mm)      |
| Height, Overall (in.) (not incl. columns)         | 34 3/4 (883 mm)  |
| Capacity: # Barrel Kegs                           | 2                |
| Capacity: # Straight Wall Kegs                    | 3                |
| Capacity : # 1/6 Size Kegs                        | 9                |
| No. of Doors                                      | 2                |
| No. of Beer Columns<br>(with single faucets)      | 2                |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4  |
| Capacity (BTU/Hr)*          | 2025 |

### ELECTRICAL DATA

|                                     |                     |
|-------------------------------------|---------------------|
| Voltage (int'l)                     | 115/60/1 (220/50/1) |
| Feed Wires (incl. ground)           | 3                   |
| Total Amps (int'l)                  | 3.7 (3.4)           |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No)            |

### SHIPPING DATA



|                       |              |
|-----------------------|--------------|
| Weight (lbs.)         | 405 (184 kg) |
| Height - Crated (in.) | 46 (1168 mm) |
| Width - Crated (in.)  | 65 (1651 mm) |
| Depth - Crated (in.)  | 42 (1067 mm) |

\* Rating @ +25°F evaporator, 90°F ambient  
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
 (varies by country)

## Model Plan Views

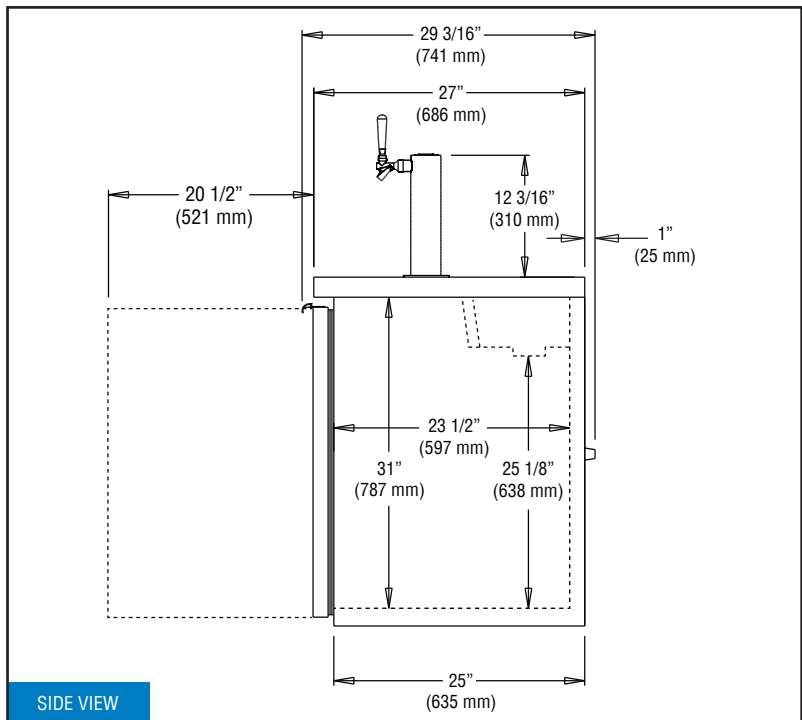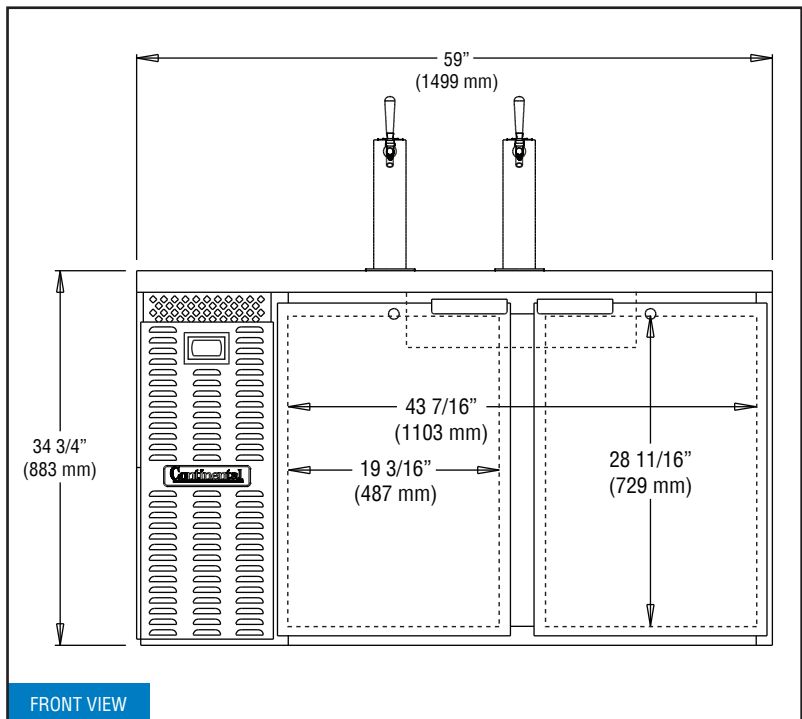

**IMPORTANT NOTE:** Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet **must** not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.

**Continental**  
 Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunkserry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Intertek



MADE IN THE U.S.A.

© Copyright 2019, Continental Refrigerator.  
 A Division of National Refrigeration & Air Conditioning Products, Inc.